

## SECURO 24 PRO NCC2CDW24C

### IMPORTANT SAFEGUARDS

**When using electrical equipment, basic safety precautions should always be followed including the following:**

#### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not use outside
2. Do not mount near gas or electric heaters. Equipment should be mounted in locations and heights where it will not readily be subjected to tampering by unauthorized personnel.
3. The use of accessory equipment and replacement parts not recommended by the manufacturer may cause an unsafe condition.
4. Do not use this equipment for anything other than its intended purpose.
5. The voltage rating for this equipment is specified on the product label. Do not connect equipment to any other voltage.


#### SAVE THESE INSTRUCTIONS

### Specifications

Type: Addressable emergency light for central battery system  
 Addressing: Automatic, based on factory unique identification number  
 Communication: Only with Schrack SECURO 24 PRO panels  
 Mounting: Ceiling, wall  
 Light source: 6W LED 50,000h operation, 6000K color temperature  
 Photo-biological safety: RG2 class, threshold distance: 0.38m  
 Luminous flux: 604 lumen  
 Max. installation height: 10m (scaled to 1 lux)  
 Housing color and material: White, plastic  
 Protection class: III  
 Dimensions: Length x width. x height: 337mm x 170mm x 62mm  
 Cable connection: Max. 2.5mm<sup>2</sup> cross-section solid or sleeved twisted wire  
 Operating mode: Non-maintained  
 Mains voltage: DC 24-32V  
 Max. input current: 0,235A  
 Constant nominal ambient temperature range: 0°C<Ta<45°C  
 Protection: IP65  
 Certificates: CE, UL





The devices' light intensity distribution curve

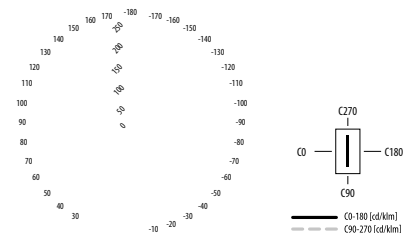

### Modes of the LED indicator: ■ Red ■ Green


Status	Led indicator			
Normal mode, programmed	Constant			
New device, not programmed				

## Dimensions

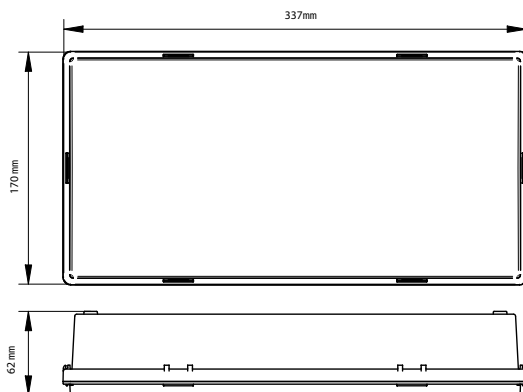

Use copper wire only  
14 - 18 AWG, sol/str  
Max. Ø 2,5 mm<sup>2</sup>

## Wiring




**Unique identifier** - SLxxxx00A0 copy this ID into commissioning book next to light's location and drawing text

**Cable wiring** - Connect the mains cable, the LED module to the luminaire using the diagram.

Correct phasing is important because of the communication line.

An incorrect connection will not cause a fault, but an incorrectly connected luminaire will also affect the function of the other luminaires on the line.

**Changing the LED** - Because of the LED's unique design, it can be changed by the manufacturer only.

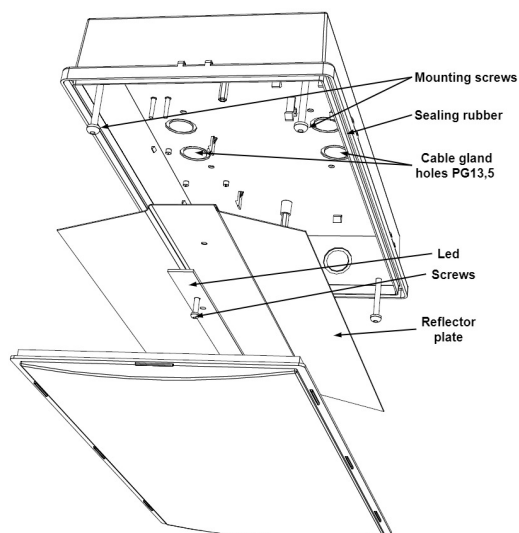

## CAUTION!

Works on the 24V mains may only be done from qualified personnel considering the local installation requirements. Before installation the supply voltage must be switched off. The device works from SECURO 24 PRO system. The mounting should be done only with the supplied retainers.

## Important!

In case of maintenance ensure that the device is disconnected from the power.

The producer will not take the responsibility for the damages caused by improper usage.