


Light Planning Data Emergency lighting

Type: NLKBU039ML
Illuminant: ERT-LED (4x1W)
Description: KB emergency lumin. ERT-LED 230V
w. supervision univ. mount

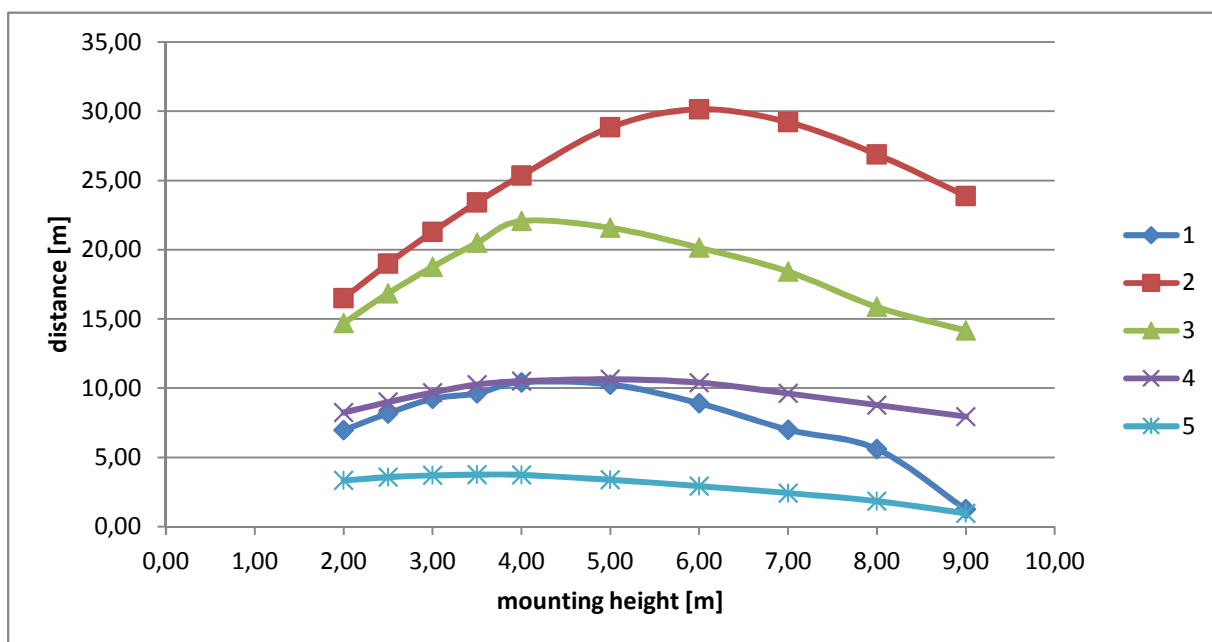

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	6,97	16,50	14,69	8,24	3,33
2,50	8,18	18,99	16,85	9,00	3,57
3,00	9,23	21,29	18,76	9,68	3,70
3,50	9,62	23,41	20,49	10,26	3,75
4,00	10,42	25,35	22,07	10,50	3,73
5,00	10,26	28,84	21,58	10,64	3,38
6,00	8,90	30,14	20,14	10,40	2,92
7,00	7,00	29,20	18,42	9,62	2,42
8,00	5,60	26,88	15,86	8,78	1,84
9,00	1,26	23,88	14,16	7,95	0,96

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m