


Light Planning Data Emergency lighting

Type: NLKCWS039M
Illuminant: ERT-LED (4x1W)
Description: Luminaire KC for CPS Mon.all Modes
4x1W ERT-LED 230V wall m.

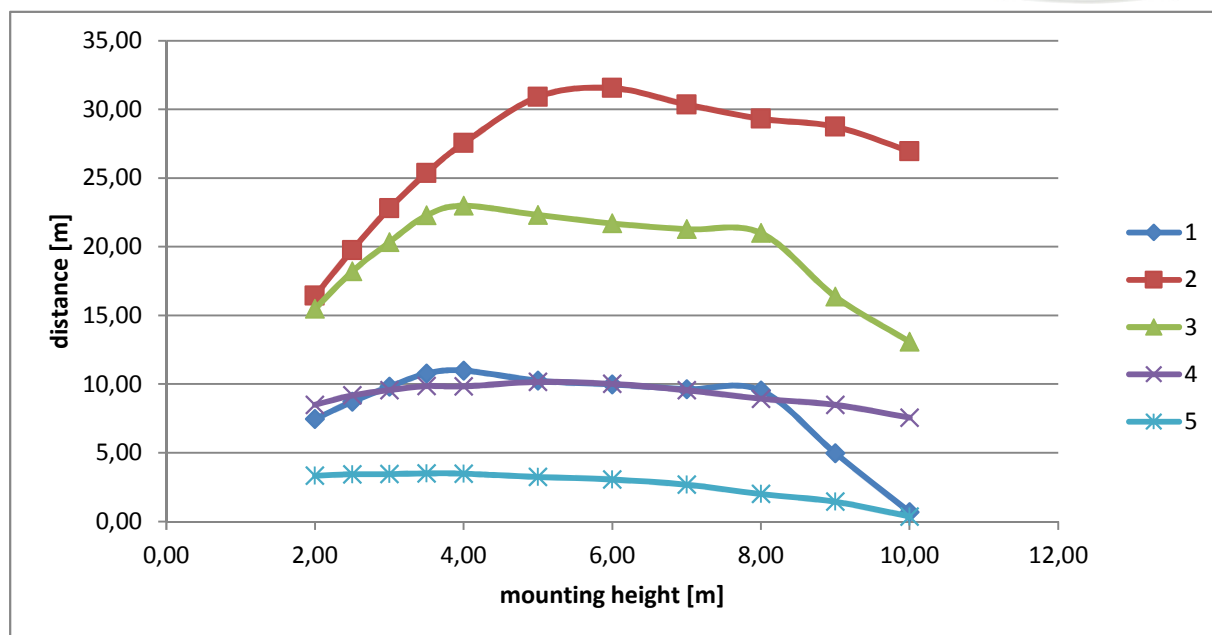

Luminaire distance table for even escape routes

= valid distances in [m]

	1	2	3	4	5
Mounting Height [m]					
2,00	7,46	16,44	15,49	8,50	3,33
2,50	8,72	19,75	18,20	9,18	3,44
3,00	9,81	22,80	20,34	9,57	3,45
3,50	10,77	25,37	22,28	9,86	3,50
4,00	10,99	27,55	22,99	9,84	3,48
5,00	10,26	30,92	22,32	10,16	3,24
6,00	9,98	31,56	21,70	10,02	3,06
7,00	9,64	30,36	21,28	9,56	2,68
8,00	9,54	29,32	21,00	8,94	2,00
9,00	4,98	28,74	16,38	8,49	1,44
10,00	0,68	26,96	13,08	7,56	0,36

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m