


Light Planning Data Emergency lighting

Type: NLKCWP433W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KC 4x1W ERT-LED 230V
 - corridor lenses

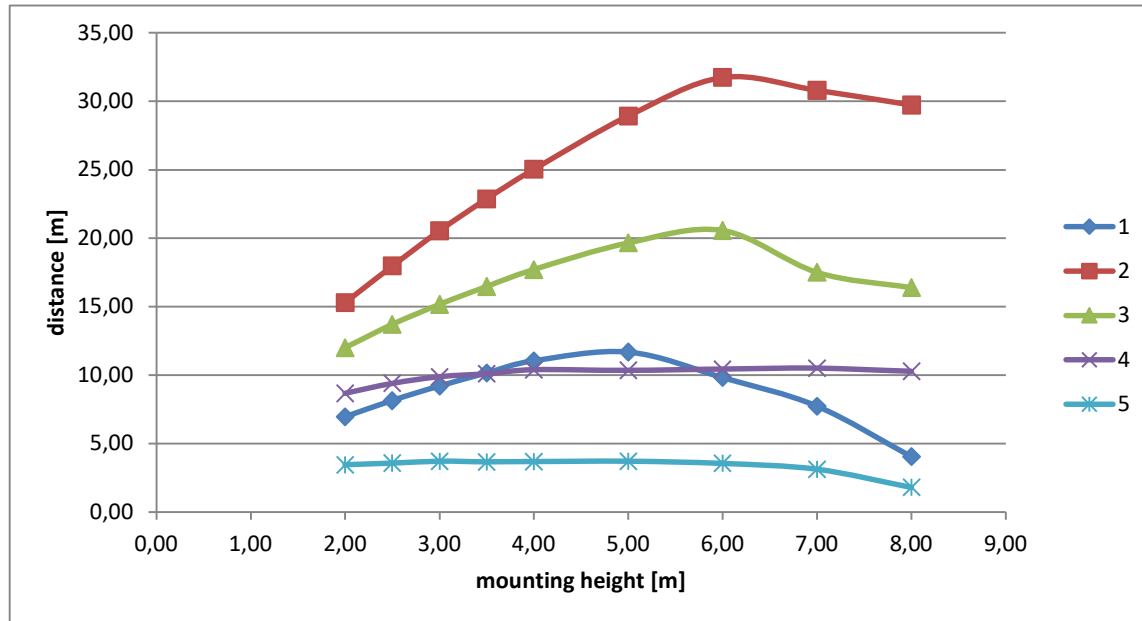

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	6,95	15,29	12,00	8,67	3,45
2,50	8,14	17,97	13,71	9,39	3,57
3,00	9,20	20,53	15,16	9,87	3,71
3,50	10,16	22,87	16,48	10,10	3,66
4,00	11,04	25,03	17,71	10,39	3,68
5,00	11,68	28,92	19,66	10,34	3,70
6,00	9,82	31,74	20,56	10,44	3,54
7,00	7,72	30,80	17,50	10,50	3,12
8,00	4,04	29,72	16,38	10,28	1,80

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m