


Light Planning Data Emergency lighting

Type: NLKCWP433W
Illuminant: ERT-LED (4x1W)
Description: Emergency luminaire KC 4x1W ERT-LED 230V
- high corridor lenses

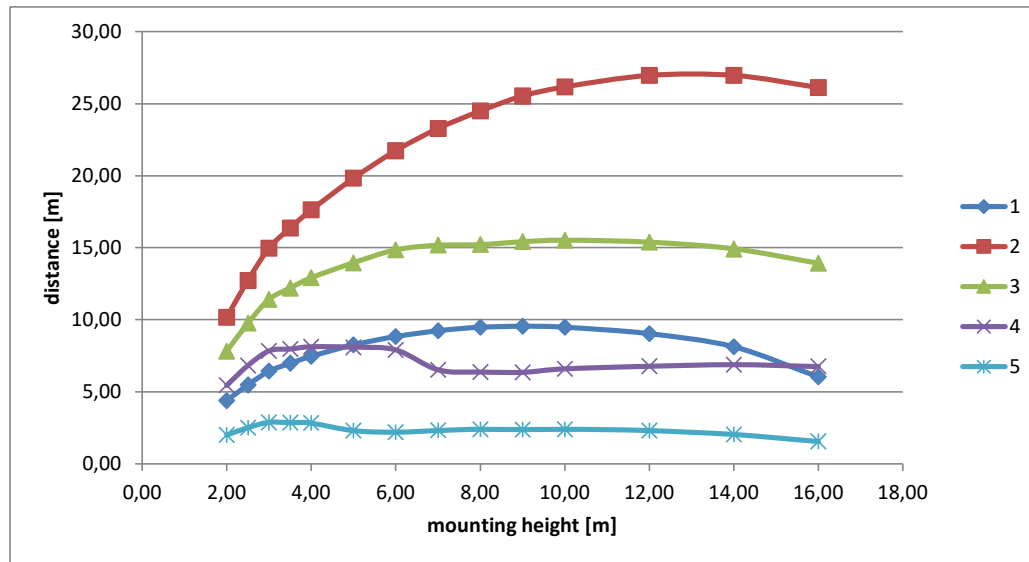

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	4,39	10,17	7,81	5,45	2,01
2,50	5,48	12,72	9,76	6,81	2,51
3,00	6,43	14,96	11,41	7,84	2,88
3,50	6,98	16,36	12,21	7,98	2,86
4,00	7,47	17,63	12,92	8,13	2,83
5,00	8,26	19,84	13,96	8,10	2,30
6,00	8,84	21,74	14,86	7,90	2,20
7,00	9,24	23,28	15,18	6,52	2,32
8,00	9,48	24,50	15,22	6,38	2,40
9,00	9,54	25,53	15,42	6,36	2,37
10,00	9,48	26,16	15,52	6,60	2,40
12,00	9,03	26,97	15,39	6,78	2,31
14,00	8,12	26,96	14,92	6,88	2,04
16,00	6,04	26,12	13,92	6,76	1,56

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m