


Light Planning Data Emergency lighting

Type: NLKCWP433W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KC 4x1W ERT-LED 230V
 - round lenses

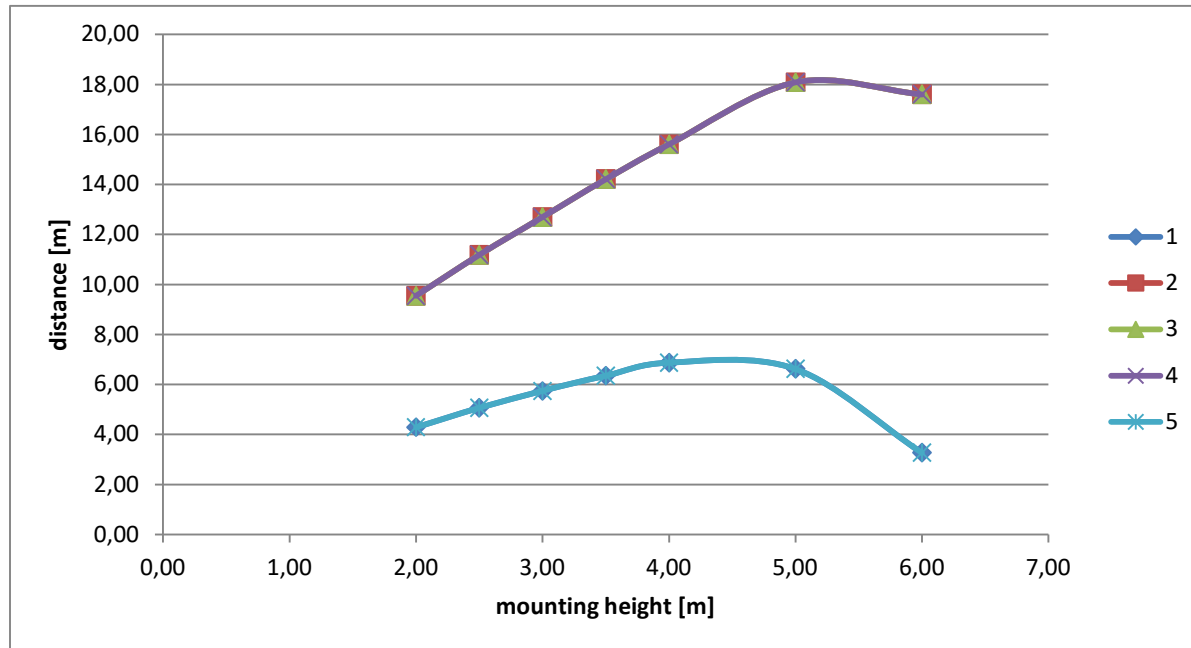

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	4,29	9,55	9,55	9,55	4,29
2,50	5,06	11,18	11,18	11,18	5,06
3,00	5,74	12,69	12,69	12,69	5,74
3,50	6,35	14,21	14,21	14,21	6,35
4,00	6,87	15,60	15,60	15,60	6,87
5,00	6,62	18,08	18,08	18,08	6,62
6,00	3,26	17,60	17,60	17,60	3,26

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m