


Light Planning Data Emergency lighting

Type: NLKCWP433W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KC 4x1W ERT-LED 230V
 - spot lenses

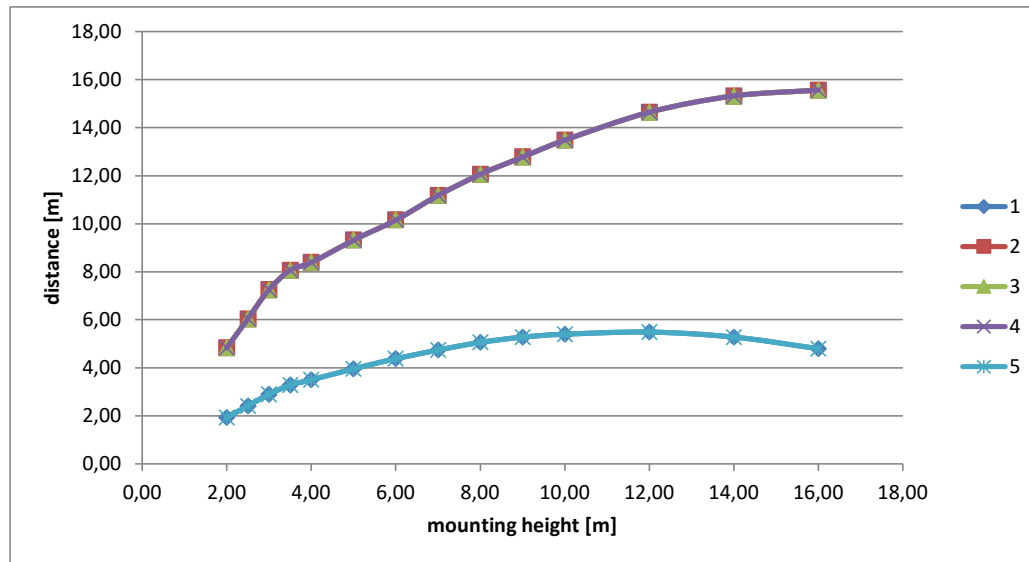

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	1,93	4,83	4,83	4,83	1,93
2,50	2,41	6,04	6,04	6,04	2,41
3,00	2,90	7,25	7,25	7,25	2,90
3,50	3,28	8,06	8,06	8,06	3,28
4,00	3,50	8,39	8,39	8,39	3,50
5,00	3,96	9,32	9,32	9,32	3,96
6,00	4,38	10,16	10,16	10,16	4,38
7,00	4,74	11,18	11,18	11,18	4,74
8,00	5,06	12,06	12,06	12,06	5,06
9,00	5,28	12,78	12,78	12,78	5,28
10,00	5,40	13,48	13,48	13,48	5,40
12,00	5,49	14,64	14,64	14,64	5,49
14,00	5,28	15,32	15,32	15,32	5,28
16,00	4,80	15,56	15,56	15,56	4,80

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m