


Light Planning Data Emergency lighting

Type: NLKCWP438W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KC 4x1W ERT-LED 230V
 - corridor lenses

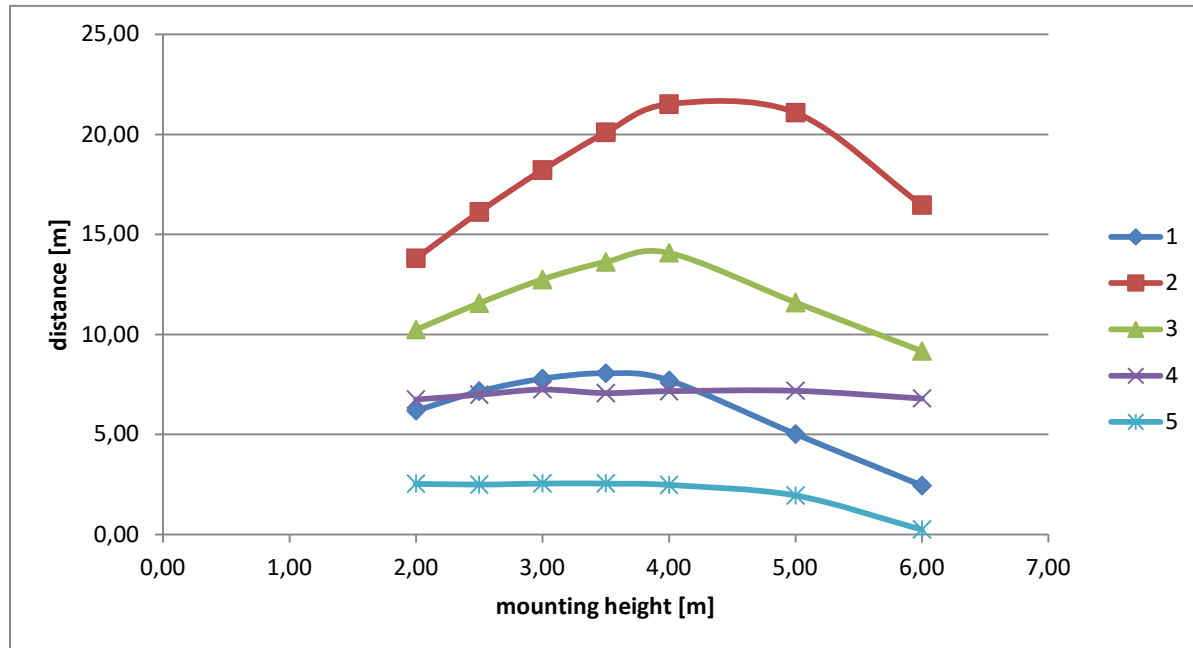

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	6,19	13,80	10,24	6,74	2,53
2,50	7,15	16,13	11,56	6,98	2,49
3,00	7,78	18,22	12,75	7,24	2,54
3,50	8,06	20,10	13,62	7,06	2,54
4,00	7,70	21,51	14,08	7,16	2,47
5,00	5,02	21,08	11,60	7,18	1,94
6,00	2,44	16,46	9,16	6,80	0,24

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m