


Light Planning Data Emergency lighting

Type: NCS2LDW14-
Illuminant:
Description: Security luminaire CERTO S2 LED
24V CON, with corridor lens

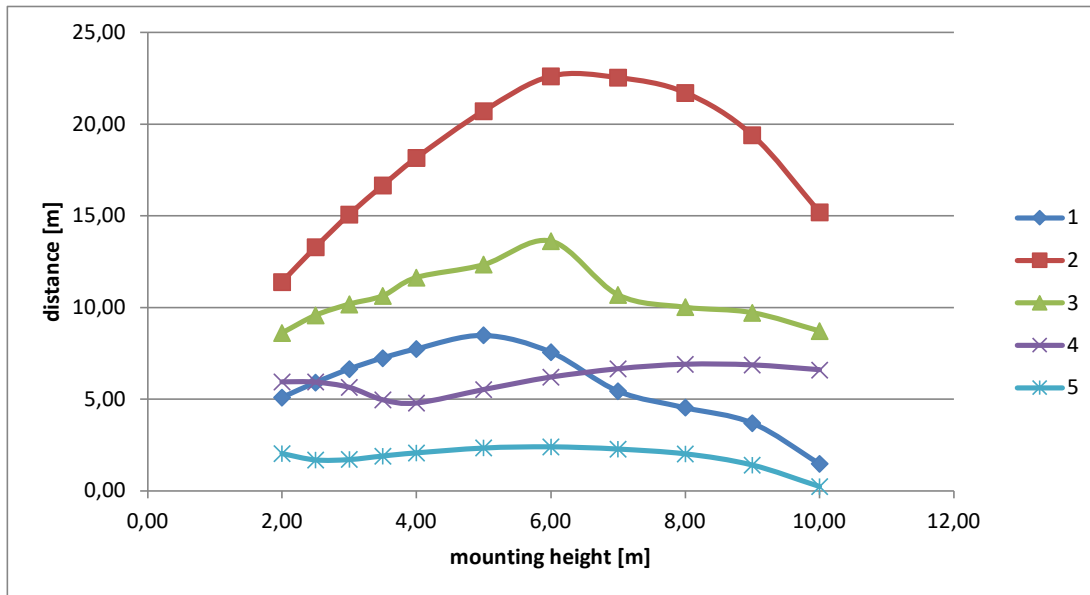

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	5,09	11,39	8,61	5,94	2,04
2,50	5,91	13,30	9,57	5,93	1,68
3,00	6,64	15,07	10,18	5,65	1,71
3,50	7,25	16,66	10,64	4,97	1,90
4,00	7,74	18,16	11,64	4,79	2,07
5,00	8,48	20,72	12,34	5,52	2,34
6,00	7,56	22,62	13,62	6,20	2,40
7,00	5,44	22,54	10,70	6,66	2,28
8,00	4,54	21,72	10,02	6,90	2,02
9,00	3,69	19,41	9,72	6,87	1,41
10,00	1,48	15,20	8,72	6,60	0,24

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m