


Light Planning Data Emergency lighting

Type: NLKCWP438W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KC 4x1W ERT-LED 230V
 - round lenses

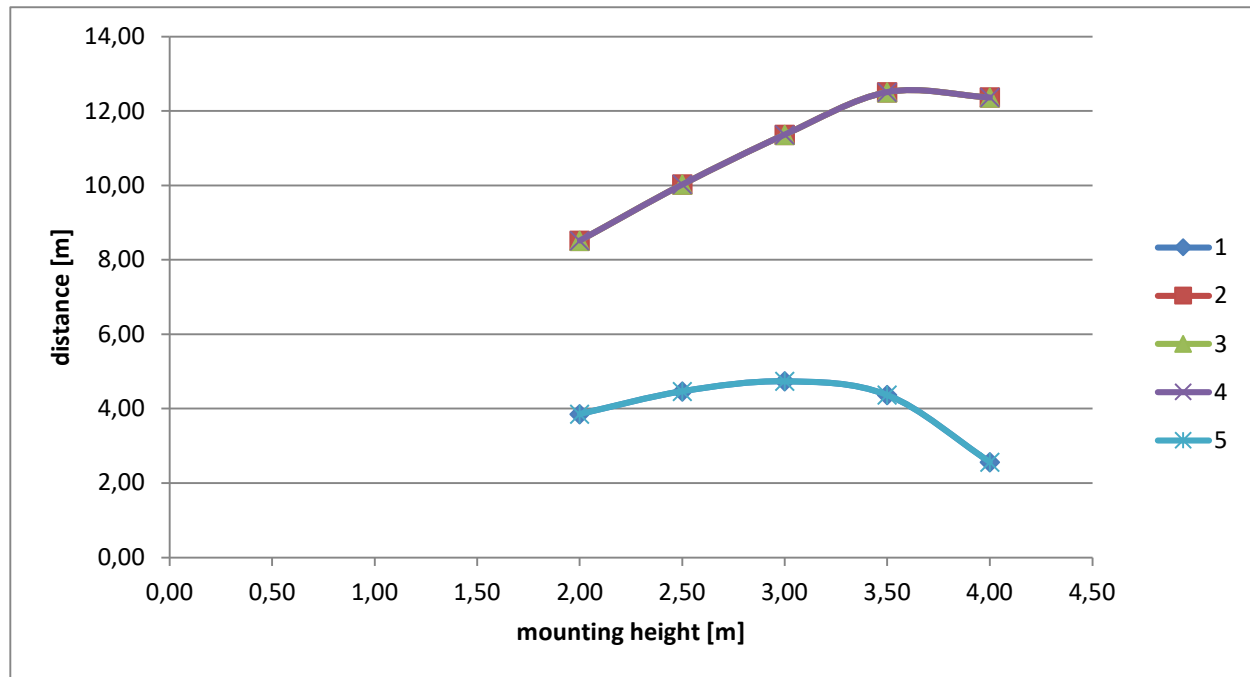

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	3,86	8,52	8,52	8,52	3,86
2,50	4,47	10,03	10,03	10,03	4,47
3,00	4,74	11,37	11,37	11,37	4,74
3,50	4,37	12,51	12,51	12,51	4,37
4,00	2,57	12,37	12,37	12,37	2,57

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m