


Light Planning Data Emergency lighting

Type: NLKCWP438W
Illuminant: ERT-LED (4x1W)
Description: Emergency luminaire KC 4x1W ERT-LED 230V
- spot lenses

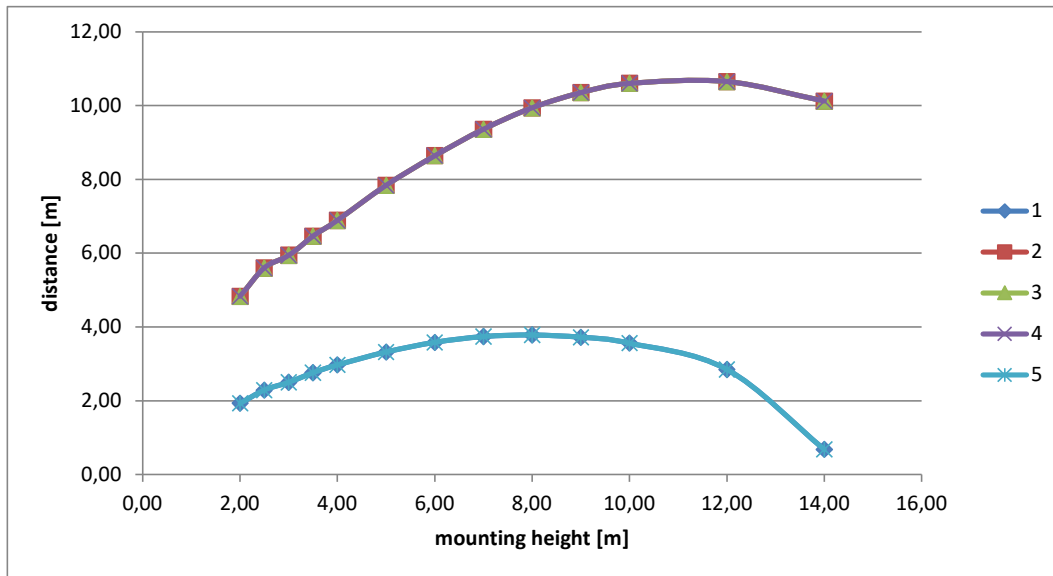

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,93	4,83	4,83	4,83	1,93
2,50	2,29	5,60	5,60	5,60	2,29
3,00	2,50	5,94	5,94	5,94	2,50
3,50	2,76	6,46	6,46	6,46	2,76
4,00	2,97	6,89	6,89	6,89	2,97
5,00	3,32	7,84	7,84	7,84	3,32
6,00	3,58	8,64	8,64	8,64	3,58
7,00	3,74	9,36	9,36	9,36	3,74
8,00	3,78	9,94	9,94	9,94	3,78
9,00	3,72	10,35	10,35	10,35	3,72
10,00	3,56	10,60	10,60	10,60	3,56
12,00	2,85	10,65	10,65	10,65	2,85
14,00	0,68	10,12	10,12	10,12	0,68

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m