


Light Planning Data Emergency lighting



Type: NLKWID009E
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KWI HP-LED
 230V EL, ceiling mounting

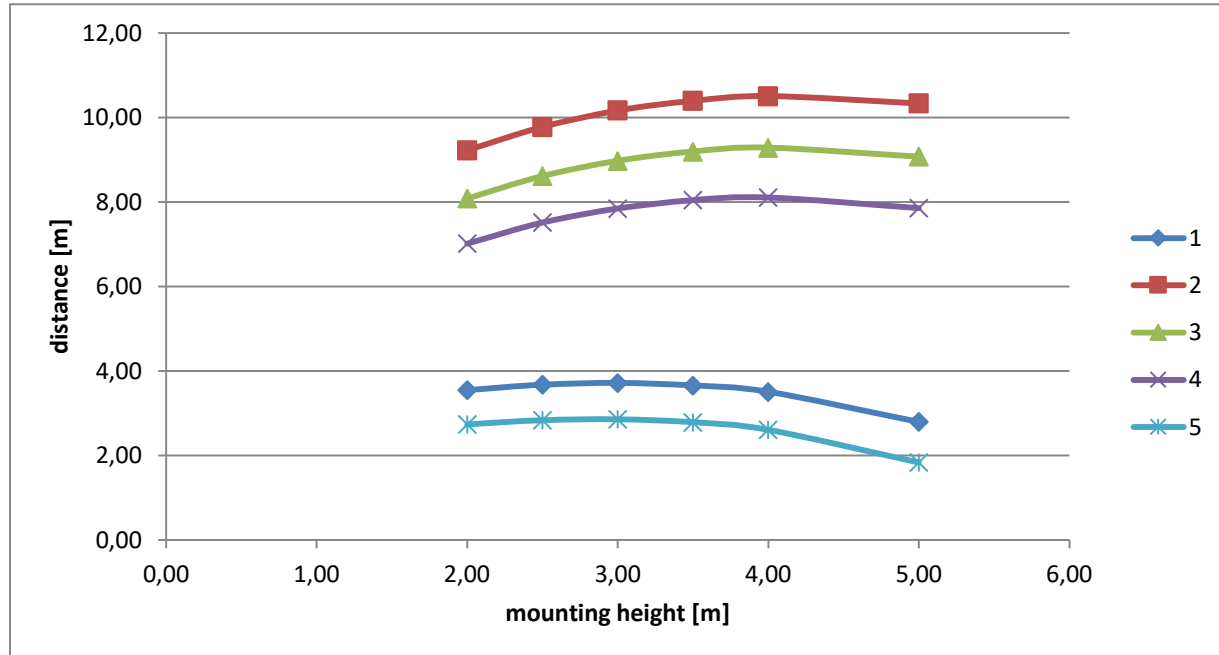

ACHTUNG: FEHLER IN DER TABELLE!!!

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m