


Light Planning Data Emergency lighting



Type: NLKWIW039E
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KWI 4x1W ERT-LED 230V EL, wall mounting

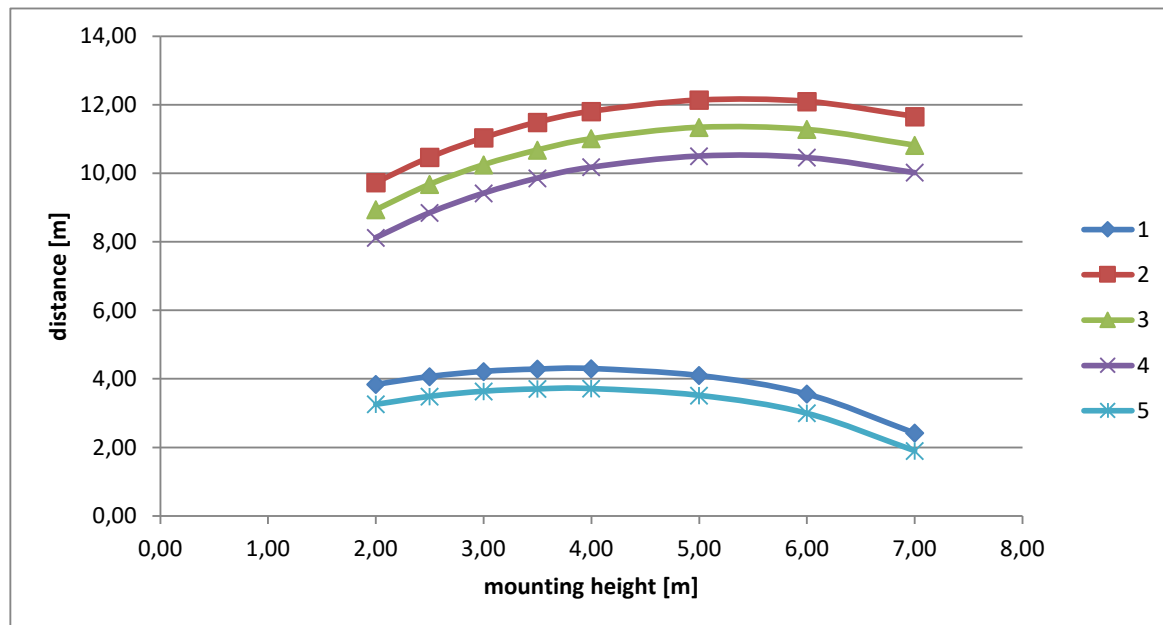

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	3,84	9,73	8,94	8,12	3,26
2,50	4,07	10,47	9,68	8,85	3,49
3,00	4,22	11,04	10,25	9,42	3,64
3,50	4,29	11,49	10,68	9,86	3,71
4,00	4,30	11,81	11,01	10,18	3,72
5,00	4,10	12,14	11,34	10,50	3,52
6,00	3,56	12,10	11,28	10,46	3,00
7,00	2,42	11,66	10,82	10,02	1,90

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m