


Light Planning Data Emergency lighting



Type: NLKWIC033S
 Illuminant: ERT-LED (4x1W)
 Description: Emerg.lum. KWI clear Autotest 4x1W
 ERT-LED 3h 230V AC ceil.

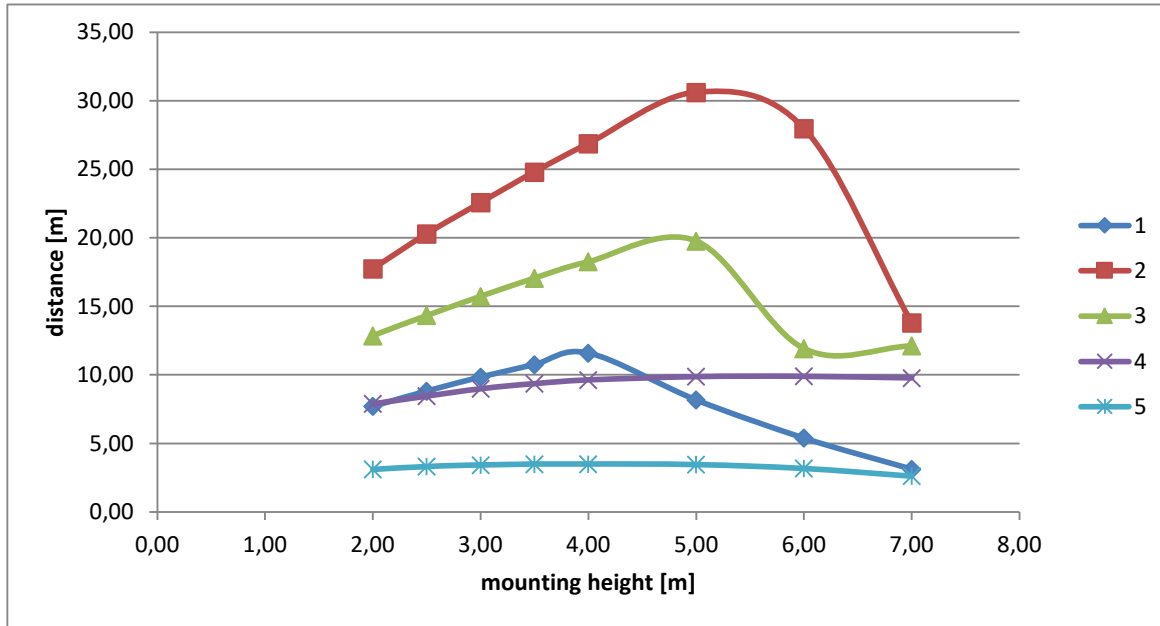

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	7,71	17,75	12,86	7,90	3,11
2,50	8,82	20,30	14,34	8,45	3,32
3,00	9,84	22,58	15,73	8,99	3,43
3,50	10,76	24,81	17,06	9,37	3,49
4,00	11,60	26,89	18,26	9,63	3,50
5,00	8,18	30,62	19,76	9,88	3,46
6,00	5,40	27,98	11,92	9,90	3,18
7,00	3,12	13,80	12,12	9,78	2,62

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m