


Light Planning Data Emergency lighting

Type: NLKWIC033S
 Illuminant: ERT-LED (4x1W)
 Description: Emerg.lum. KWI clear Autotest 4x1W
 ERT-LED 3h 230V AC ceil.

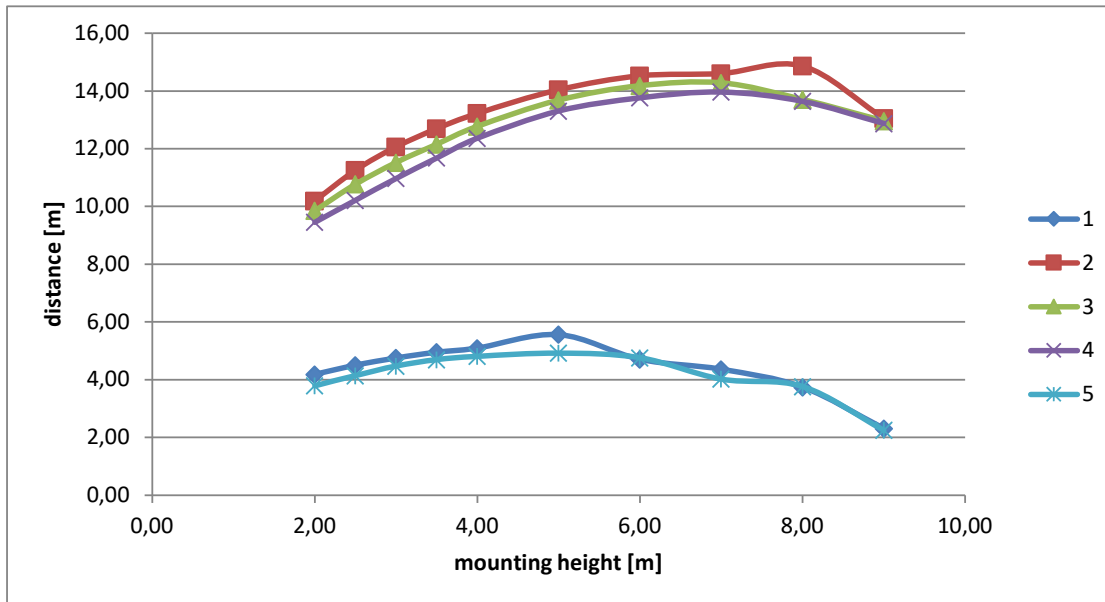

ACHTUNG: FEHLER IN DER TABELLE!!!

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	4,18	10,19	9,85	9,45	3,79
2,50	4,50	11,25	10,77	10,21	4,14
3,00	4,75	12,06	11,52	10,97	4,47
3,50	4,95	12,69	12,15	11,68	4,69
4,00	5,09	13,22	12,77	12,36	4,81
5,00	5,56	14,04	13,68	13,30	4,92
6,00	4,70	14,52	14,18	13,76	4,76
7,00	4,36	14,60	14,28	13,96	4,02
8,00	3,74	14,86	13,70	13,64	3,76
9,00	2,31	13,05	12,96	12,87	2,25

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m