


Light Planning Data Emergency lighting



Type: NLKWIC033S
 Illuminant: ERT-LED (4x1W)
 Description: Emerg.lum. KWI clear Autotest 4x1W
 ERT-LED 3h 230V AC ceil.

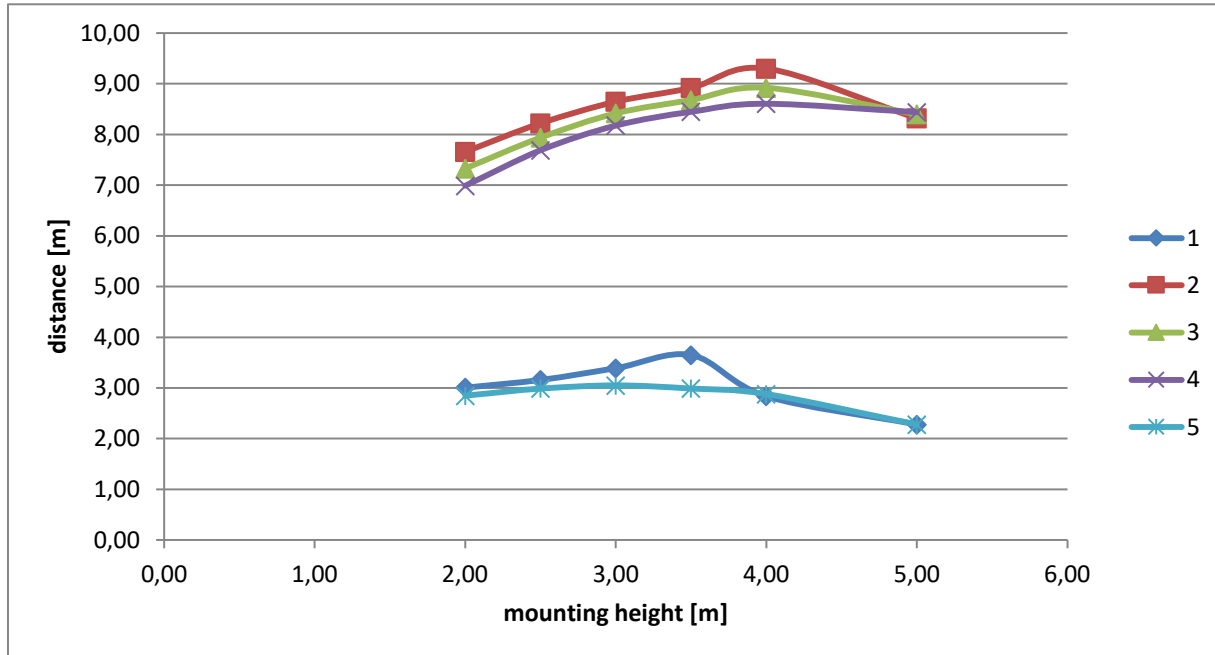

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	3,01	7,66	7,33	6,99	2,85
2,50	3,16	8,22	7,94	7,69	2,99
3,00	3,39	8,65	8,42	8,18	3,05
3,50	3,65	8,92	8,68	8,45	2,99
4,00	2,84	9,30	8,92	8,61	2,88
5,00	2,28	8,32	8,40	8,44	2,28

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m