


Lichttechnische Daten Notbeleuchtung

Artikelnummer: NLKWID033S
Leuchtmittel: ERT-LED (4x1W)
Beschreibung: Notleuchte KWI Autotest 4x1W ERT-LED 3h 230V AC Deckenanbau

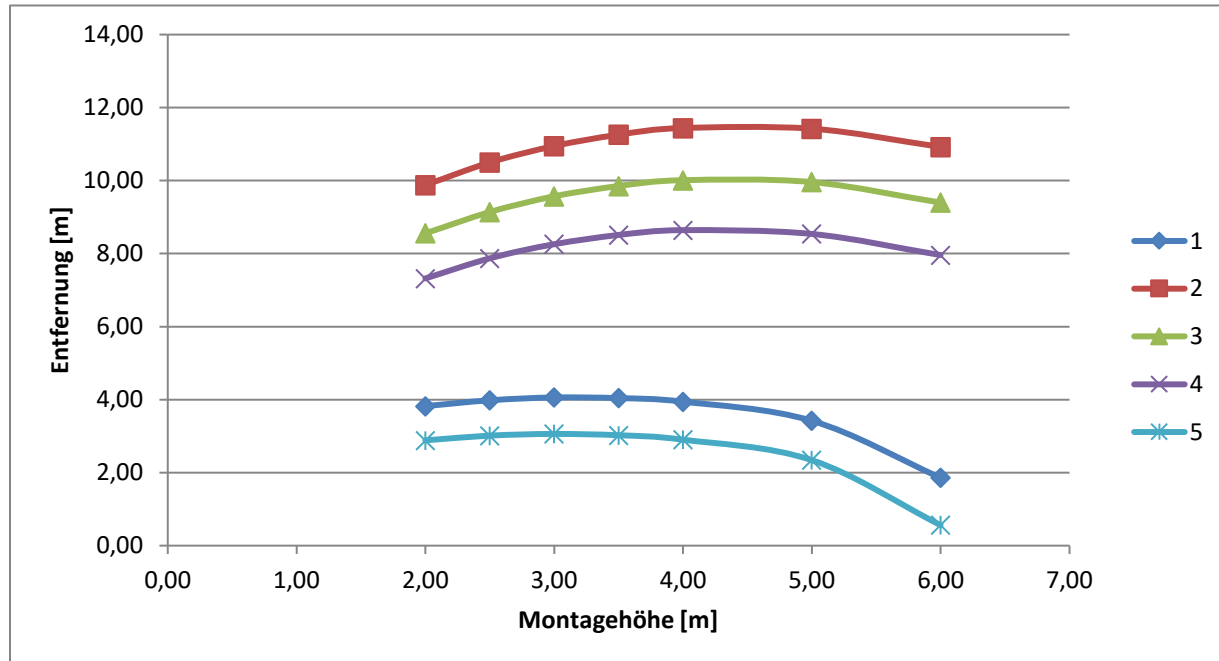

Leuchtenabstandstabelle für ebene Fluchtwege

 = gültige Abstandswerte [m]

Montagehöhe [m]	1 	2 	3 	4 	5 
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Die oben angeführten Werte gelten bei folgenden Parametern:
Notbeleuchtungsfaktor 1, Wartungsfaktor 0,8, E_{min} auf der Mittellinie:
1lx, E_{min} auf der halben Rettungswegbreite: 0,5lx, Maximale
Gleichmäßigkeit: 40:1, Breite des Fluchtweges: 2m