


Light Planning Data Emergency lighting

Type: NLKWIC433W
Illuminant: ERT-LED (4x1W)
Description: 4x1W ERT-LED 3h 230V - with high corridor lens

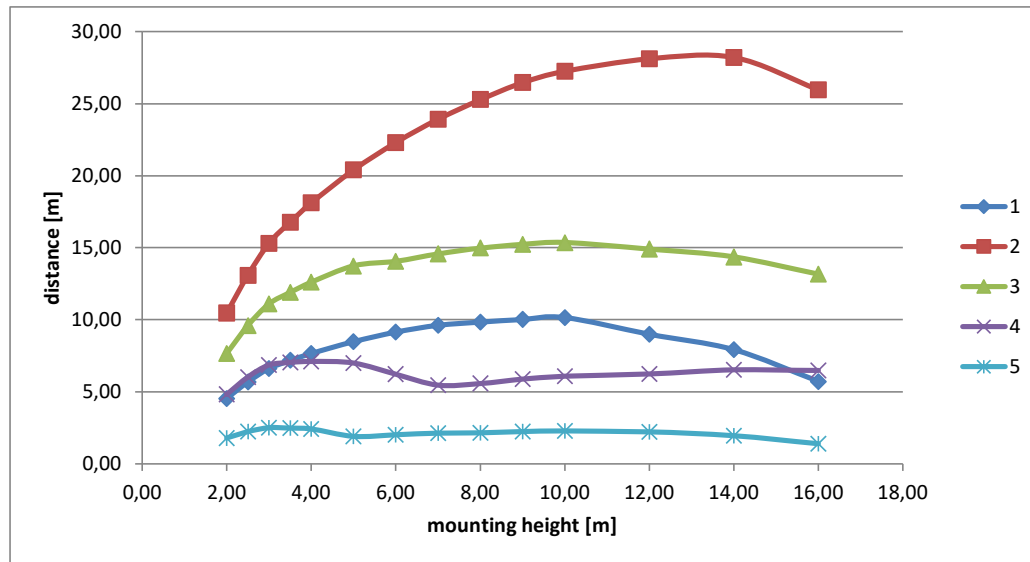

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,68	13,09	9,59	6,03	2,24
3,00	6,62	15,30	11,10	6,86	2,51
3,50	7,18	16,77	11,90	7,04	2,48
4,00	7,66	18,12	12,61	7,11	2,42
5,00	8,48	20,40	13,74	7,00	1,92
6,00	9,14	22,30	14,06	6,22	2,02
7,00	9,62	23,92	14,58	5,46	2,14
8,00	9,84	25,28	14,98	5,58	2,16
9,00	10,02	26,46	15,24	5,88	2,25
10,00	10,16	27,24	15,36	6,08	2,28
12,00	9,00	28,11	14,91	6,24	2,22
14,00	7,92	28,20	14,36	6,52	1,96
16,00	5,72	25,96	13,16	6,48	1,40

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m