


Light Planning Data Emergency lighting

Type: NLKWIC433W
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire KWI Wireless 4x1W ERT-LED 3h 230V - with round lens

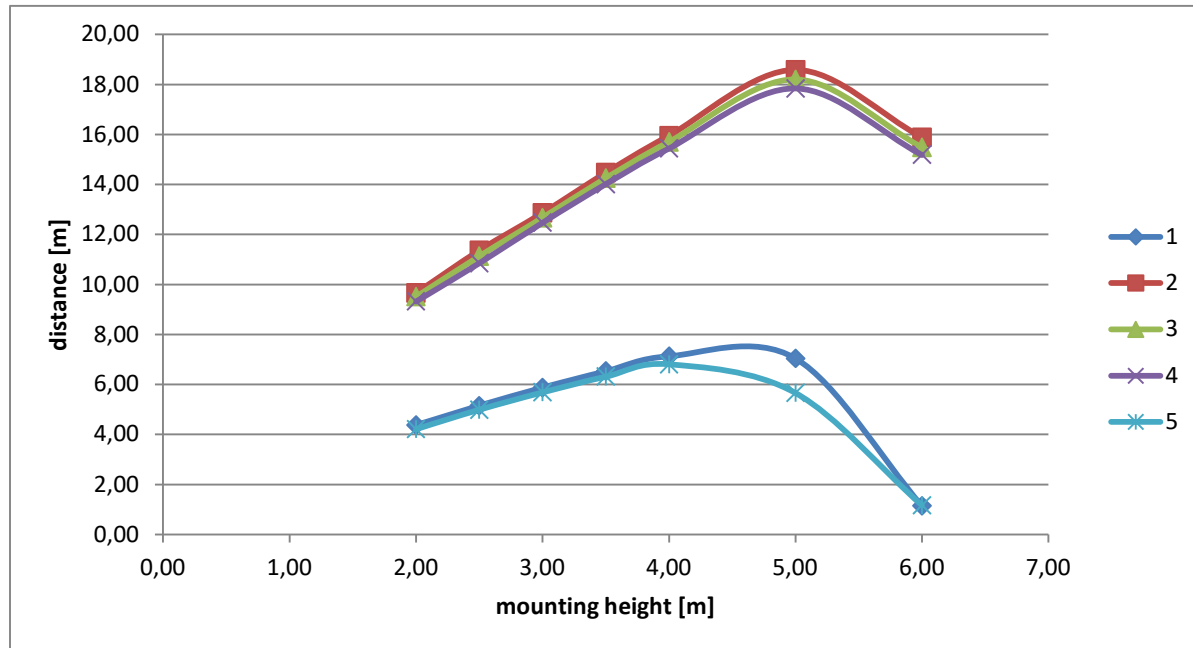

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	4,37	9,66	9,51	9,32	4,21
2,50	5,15	11,36	11,13	10,85	4,99
3,00	5,87	12,86	12,67	12,47	5,68
3,50	6,53	14,47	14,25	14,01	6,31
4,00	7,12	15,95	15,70	15,44	6,80
5,00	7,04	18,58	18,20	17,84	5,66
6,00	1,14	15,88	15,48	15,18	1,16

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m