


Light Planning Data Emergency lighting

Type: NLPMW433WL
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire PM 4x1W ERT-LED 230V
 - corridor lenses

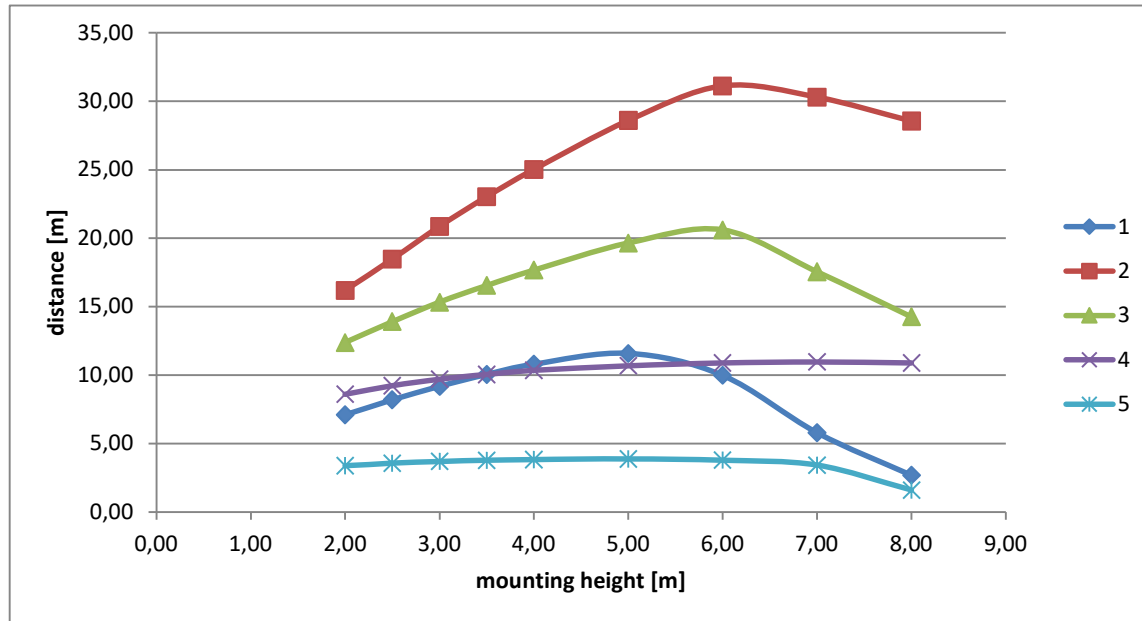

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	7,09	16,18	12,37	8,60	3,37
2,50	8,19	18,48	13,91	9,22	3,56
3,00	9,17	20,86	15,32	9,69	3,69
3,50	10,05	23,03	16,55	10,05	3,77
4,00	10,79	25,02	17,67	10,34	3,82
5,00	11,58	28,60	19,64	10,68	3,88
6,00	9,98	31,12	20,60	10,88	3,78
7,00	5,78	30,30	17,54	10,96	3,42
8,00	2,68	28,56	14,26	10,88	1,60

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m