


Light Planning Data Emergency lighting

Type: NLPMW438WL
 Illuminant: ERT-LED (4x1W)
 Description: Emergency luminaire PM 4x1W ERT-LED 230V
 - spot lenses

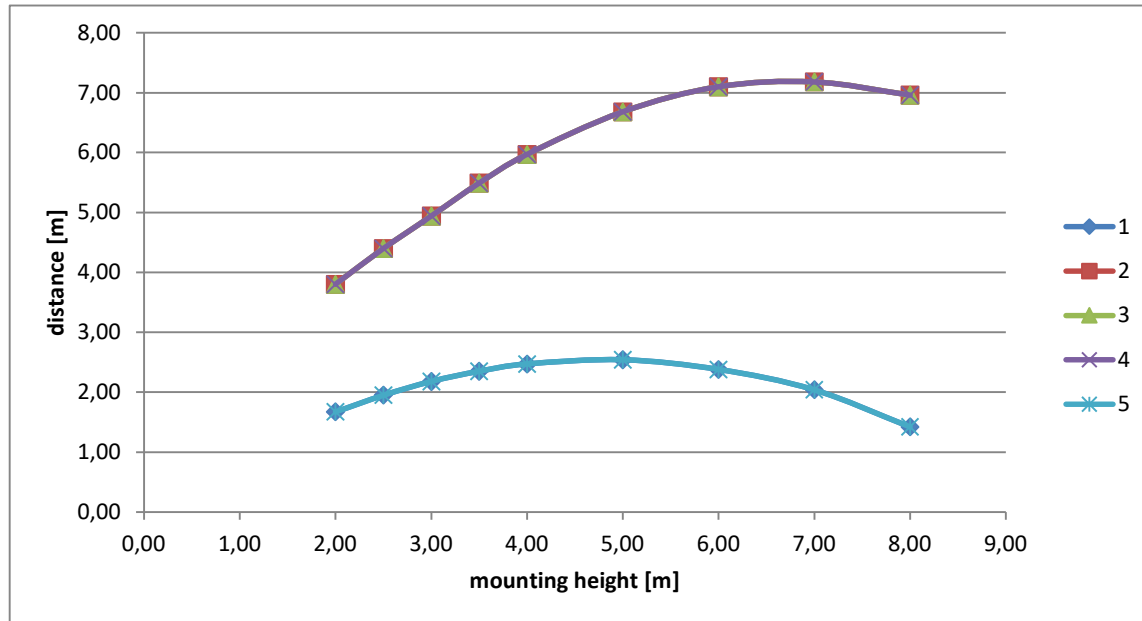

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	1,67	3,80	3,80	3,80	1,67
2,50	1,95	4,40	4,40	4,40	1,95
3,00	2,18	4,94	4,94	4,94	2,18
3,50	2,35	5,49	5,49	5,49	2,35
4,00	2,47	5,97	5,97	5,97	2,47
5,00	2,54	6,68	6,68	6,68	2,54
6,00	2,38	7,10	7,10	7,10	2,38
7,00	2,04	7,18	7,18	7,18	2,04
8,00	1,42	6,96	6,96	6,96	1,42

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m