
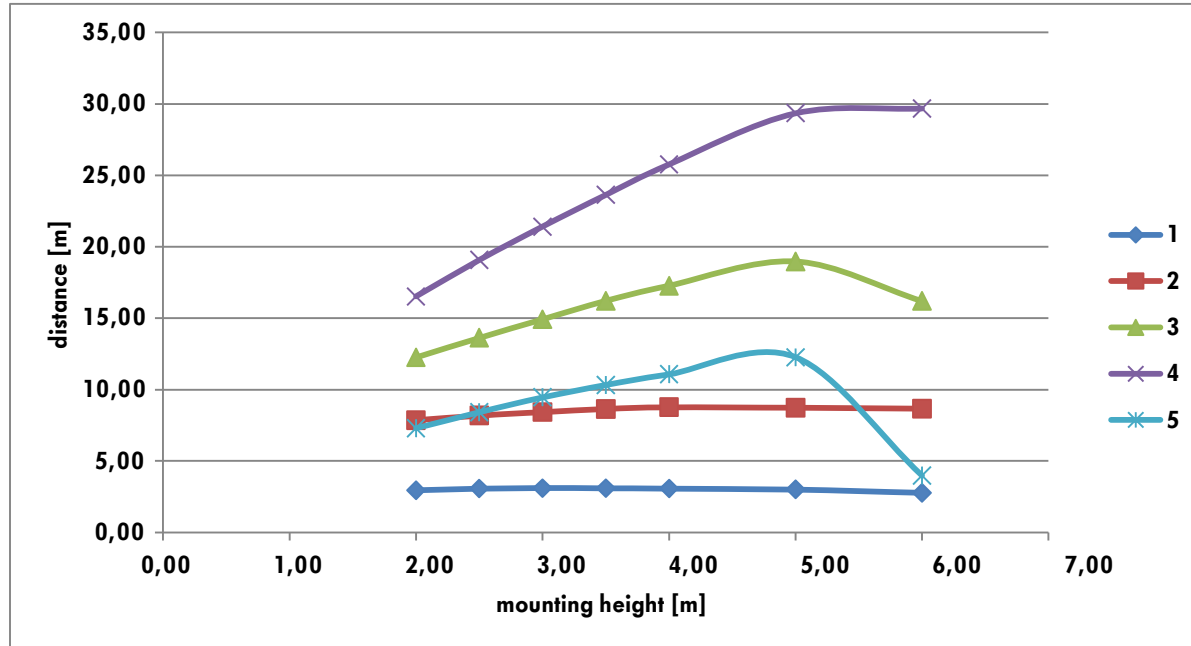


Light Planning Data Emergency lighting

Type: NLILD1029E
 Illuminant: ERT-LED (1x3W)
 Description: Emergency luminaire IL 1x3W ERT-LED 230V white
 - with corridor lens



Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	2,94	7,85	12,25	16,52	7,29
2,50	3,06	8,18	13,62	19,07	8,41
3,00	3,10	8,42	14,92	21,40	9,45
3,50	3,09	8,64	16,21	23,63	10,32
4,00	3,06	8,76	17,27	25,76	11,07
5,00	3,00	8,72	18,96	29,34	12,26
6,00	2,76	8,66	16,20	29,68	3,98

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m