


Light Planning Data Emergency lighting

Type: **NLIDL029E**
Illuminant: **ERT-LED (1x3W)**
Emergency luminaire IL 1x3W ERT-LED 230V white
- with high corridor lens

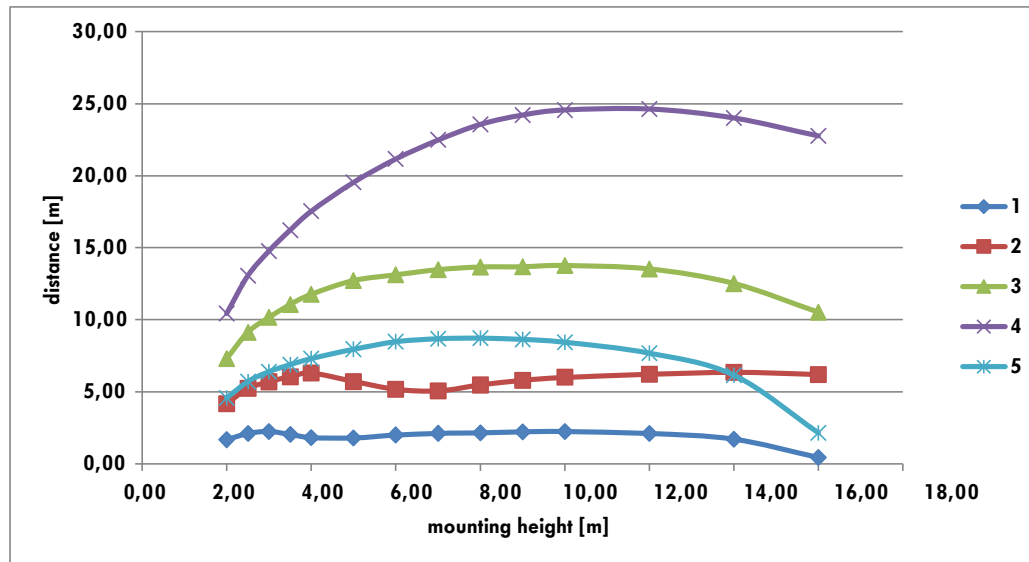

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,68	4,18	7,30	10,44	4,57
2,50	2,10	5,23	9,13	13,05	5,71
3,00	2,25	5,70	10,17	14,77	6,40
3,50	2,05	6,05	11,05	16,22	6,88
4,00	1,83	6,30	11,78	17,54	7,30
5,00	1,80	5,72	12,72	19,54	7,96
6,00	2,00	5,18	13,12	21,16	8,48
7,00	2,12	5,06	13,48	22,48	8,68
8,00	2,16	5,48	13,66	23,56	8,72
9,00	2,22	5,79	13,68	24,21	8,64
10,00	2,24	6,00	13,76	24,56	8,44
12,00	2,10	6,21	13,53	24,63	7,68
14,00	1,72	6,36	12,52	24,00	6,16
16,00	0,44	6,20	10,52	22,76	2,16

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m