


Light Planning Data Emergency lighting

Type: NLILxL423x
Illuminant: ERT-LED (1x3W)
Emergency luminaire IL 230V white
- with optional spot lens

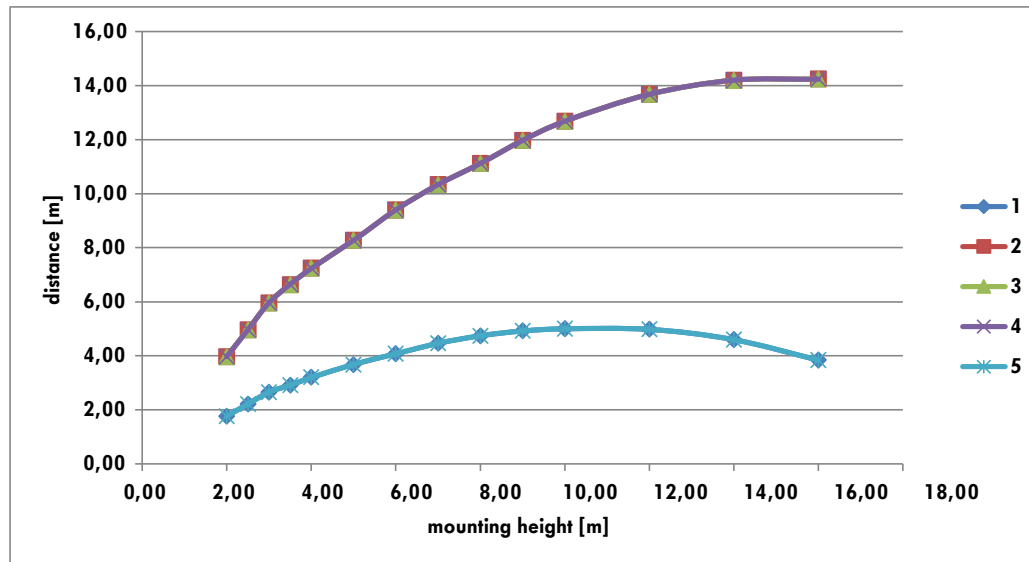

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,21	4,96	4,96	4,96	2,21
3,00	2,65	5,96	5,96	5,96	2,65
3,50	2,91	6,64	6,64	6,64	2,91
4,00	3,20	7,24	7,24	7,24	3,20
5,00	3,68	8,28	8,28	8,28	3,68
6,00	4,08	9,40	9,40	9,40	4,08
7,00	4,46	10,34	10,34	10,34	4,46
8,00	4,74	11,12	11,12	11,12	4,74
9,00	4,92	11,97	11,97	11,97	4,92
10,00	5,00	12,68	12,68	12,68	5,00
12,00	4,98	13,68	13,68	13,68	4,98
14,00	4,60	14,20	14,20	14,20	4,60
16,00	3,84	14,24	14,24	14,24	3,84

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m