
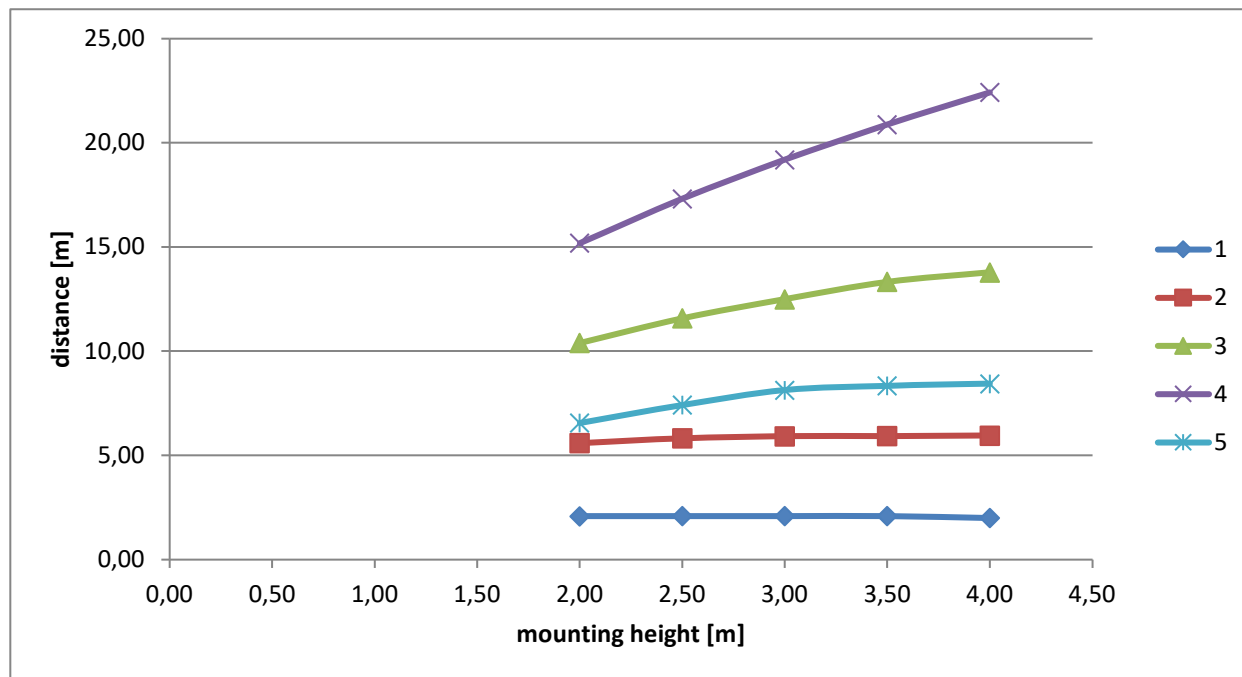


Light Planning Data Emergency lighting corridor lens

Type: NLILDK423S
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.lum.IL 1x3W ERT-LED 3h
 230VAC Self C.radial surface m.



Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	2,08	5,59	10,40	15,19	6,56
2,50	2,09	5,82	11,58	17,32	7,42
3,00	2,09	5,92	12,50	19,19	8,13
3,50	2,09	5,93	13,33	20,88	8,34
4,00	2,00	5,95	13,79	22,43	8,44

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m