
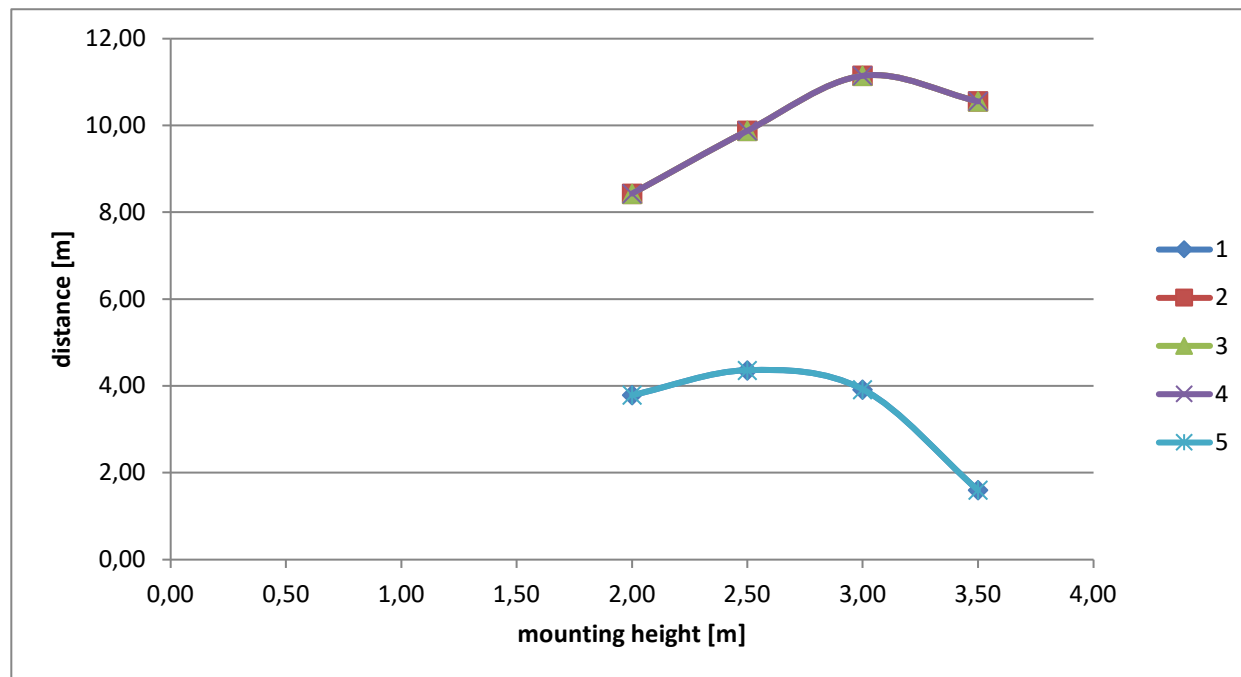


Light Planning Data Emergency lighting round lens

Type: NLILDK423S
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.lum.IL 1x3W ERT-LED 3h
 230VAC Self C.radial surface m.



Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00					
2,00	3,79	8,43	8,43	8,43	3,79
2,50	4,36	9,88	9,88	9,88	4,36
3,00	3,92	11,15	11,15	11,15	3,92
3,50	1,60	10,56	10,56	10,56	1,60

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m