
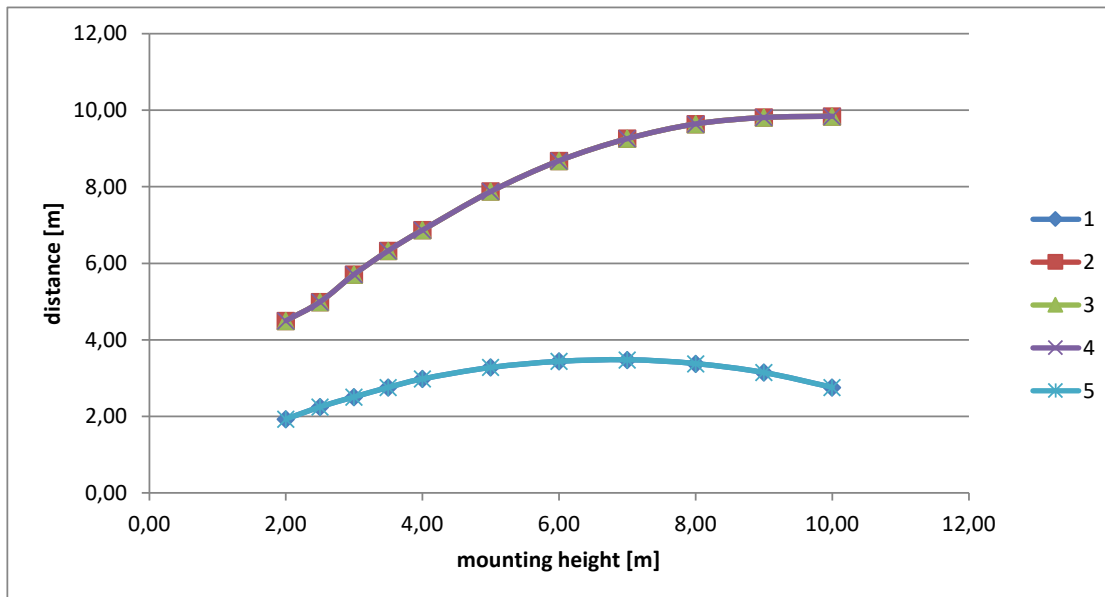


Light Planning Data Emergency lighting spot lens

Type: NLILDK423S
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.lum.IL 1x3W ERT-LED 3h
 230VAC Self C.radial surface m.



Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,93	4,50	4,50	4,50	1,93
2,50	2,25	4,99	4,99	4,99	2,25
3,00	2,51	5,71	5,71	5,71	2,51
3,50	2,76	6,33	6,33	6,33	2,76
4,00	2,98	6,87	6,87	6,87	2,98
5,00	3,28	7,88	7,88	7,88	3,28
6,00	3,44	8,68	8,68	8,68	3,44
7,00	3,48	9,26	9,26	9,26	3,48
8,00	3,38	9,64	9,64	9,64	3,38
9,00	3,15	9,81	9,81	9,81	3,15
10,00	2,76	9,84	9,84	9,84	2,76

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m