


Light Planning Data Emergency lighting

Type: NLILxLx23x
 Illuminant: ERT-LED (1x3W)
 Emergency luminaire IL 1x3W ERT-LED 230V white
 - with high corridor lens

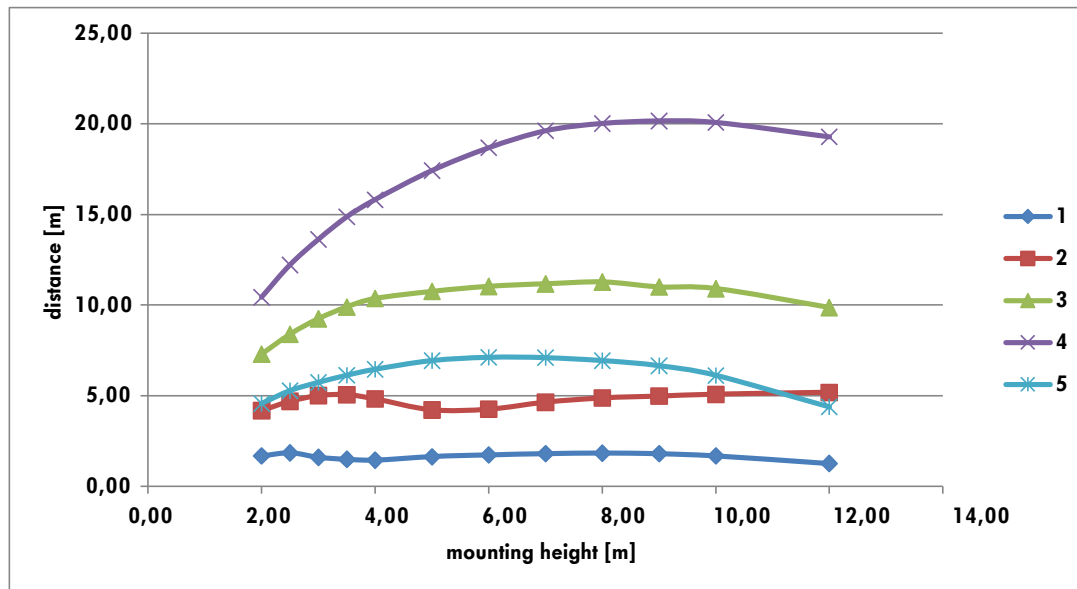

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,68	4,18	7,30	10,44	4,57
2,50	1,85	4,69	8,39	12,22	5,28
3,00	1,60	5,01	9,25	13,63	5,74
3,50	1,49	5,06	9,90	14,87	6,13
4,00	1,45	4,83	10,37	15,82	6,46
5,00	1,64	4,22	10,76	17,42	6,94
6,00	1,74	4,26	11,04	18,68	7,12
7,00	1,80	4,64	11,18	19,62	7,10
8,00	1,84	4,88	11,28	20,02	6,94
9,00	1,80	4,98	11,01	20,16	6,66
10,00	1,68	5,08	10,92	20,08	6,12
12,00	1,26	5,19	9,87	19,29	4,38

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m