


Light Planning Data Emergency lighting

Type: NLILxL423x
Illuminant: ERT-LED (1x3W)

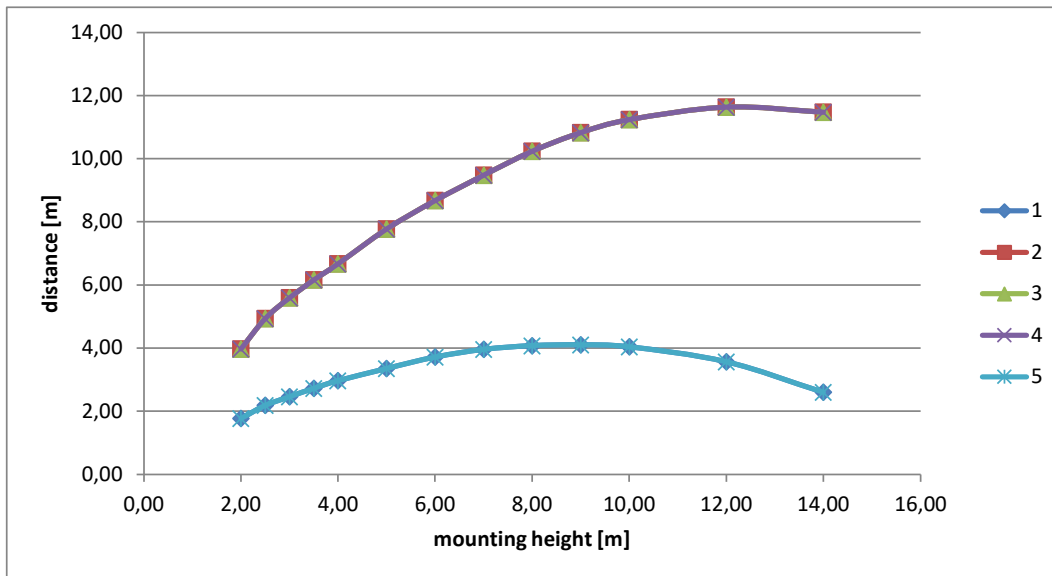

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,19	4,94	4,94	4,94	2,19
3,00	2,46	5,60	5,60	5,60	2,46
3,50	2,73	6,16	6,16	6,16	2,73
4,00	2,97	6,67	6,67	6,67	2,97
5,00	3,36	7,78	7,78	7,78	3,36
6,00	3,72	8,68	8,68	8,68	3,72
7,00	3,96	9,48	9,48	9,48	3,96
8,00	4,08	10,24	10,24	10,24	4,08
9,00	4,11	10,83	10,83	10,83	4,11
10,00	4,04	11,24	11,24	11,24	4,04
12,00	3,57	11,64	11,64	11,64	3,57
14,00	2,60	11,48	11,48	11,48	2,60

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m