


Light Planning Data Emergency lighting

Type: NLILxL428x
Illuminant: ERT-LED (1x3W)

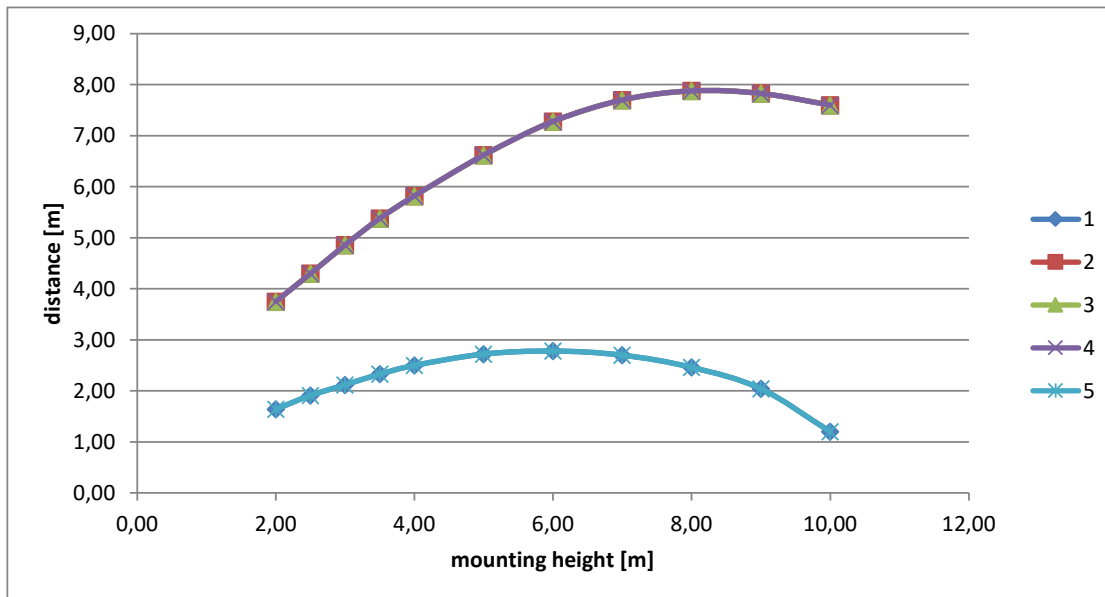

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	1,64	3,75	3,75	3,75	1,64
2,50	1,91	4,30	4,30	4,30	1,91
3,00	2,12	4,86	4,86	4,86	2,12
3,50	2,33	5,38	5,38	5,38	2,33
4,00	2,50	5,82	5,82	5,82	2,50
5,00	2,72	6,62	6,62	6,62	2,72
6,00	2,78	7,28	7,28	7,28	2,78
7,00	2,70	7,70	7,70	7,70	2,70
8,00	2,46	7,88	7,88	7,88	2,46
9,00	2,04	7,83	7,83	7,83	2,04
10,00	1,20	7,60	7,60	7,60	1,20

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m