


Light Planning Data Emergency lighting

Type: NLILxLx28x
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.lum.IL1x3W ERT-LED 3h 230V AC
 - high corridor lens

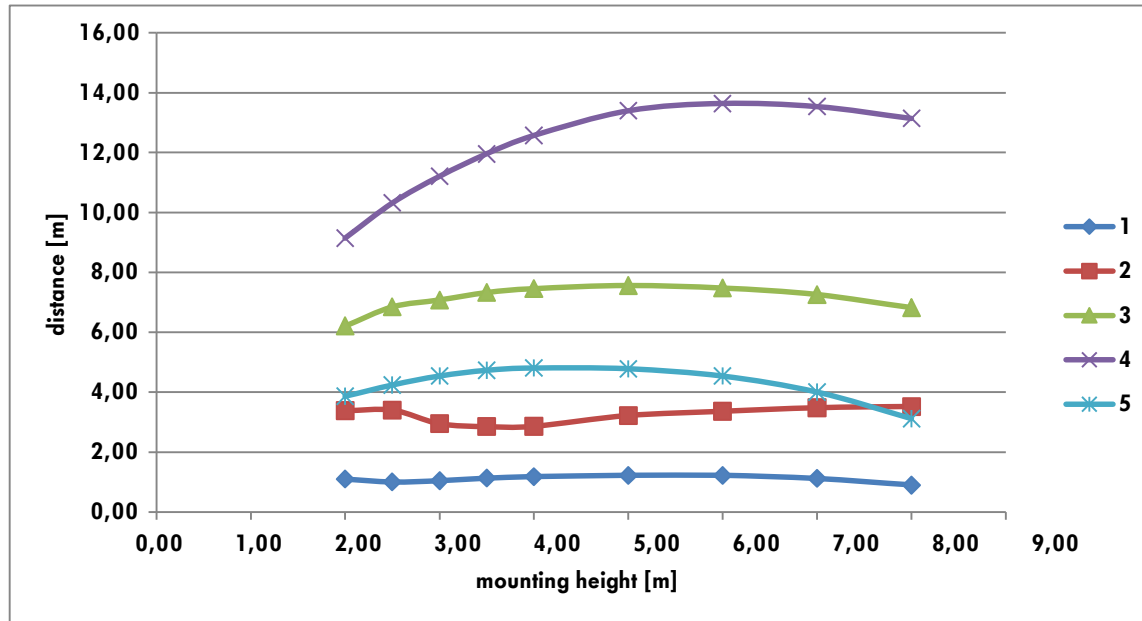

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	1,10	3,38	6,21	9,14	3,86
2,50	1,00	3,40	6,85	10,32	4,24
3,00	1,04	2,95	7,08	11,21	4,54
3,50	1,13	2,85	7,33	11,96	4,73
4,00	1,18	2,86	7,46	12,57	4,81
5,00	1,22	3,22	7,56	13,40	4,78
6,00	1,22	3,36	7,48	13,64	4,54
7,00	1,12	3,48	7,26	13,54	4,00
8,00	0,90	3,52	6,82	13,14	3,12

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m