


Light Planning Data Emergency lighting

Type: nlildf029m
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.luminaire IL ERT-LED 230V
 AC/DC ML hallway surface m.

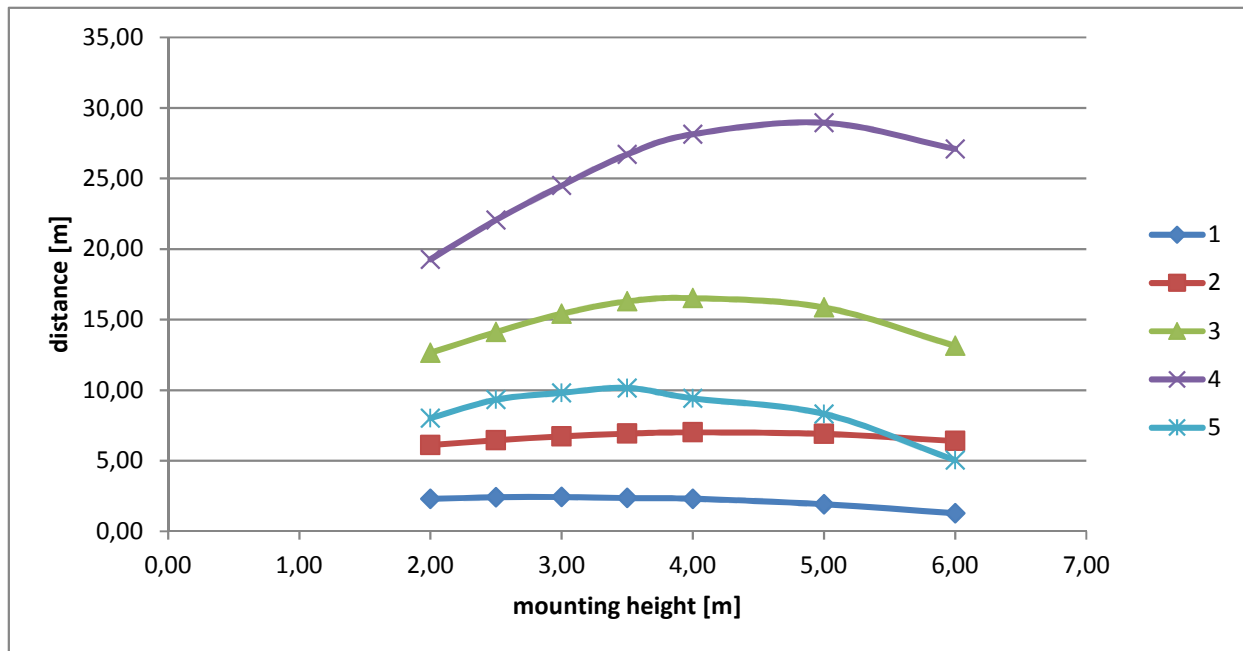

Luminaire distance table for even escape routes

= valid distances in [m]

	1	2	3	4	5
Mounting Height [m]					
2,00	2,30	6,11	12,65	19,27	8,02
2,50	2,41	6,45	14,12	22,07	9,33
3,00	2,43	6,73	15,42	24,50	9,81
3,50	2,36	6,92	16,29	26,71	10,16
4,00	2,31	7,01	16,52	28,14	9,42
5,00	1,92	6,90	15,86	28,96	8,32
6,00	1,28	6,40	13,14	27,10	5,04

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m