


Light Planning Data Emergency lighting

Type: nlilds028w
 Illuminant: ERT-LED (1x3W)
 Description: Emerg.lum.IL1x3W ERT-LED8h
 230VAC Wirelessspot surface m.

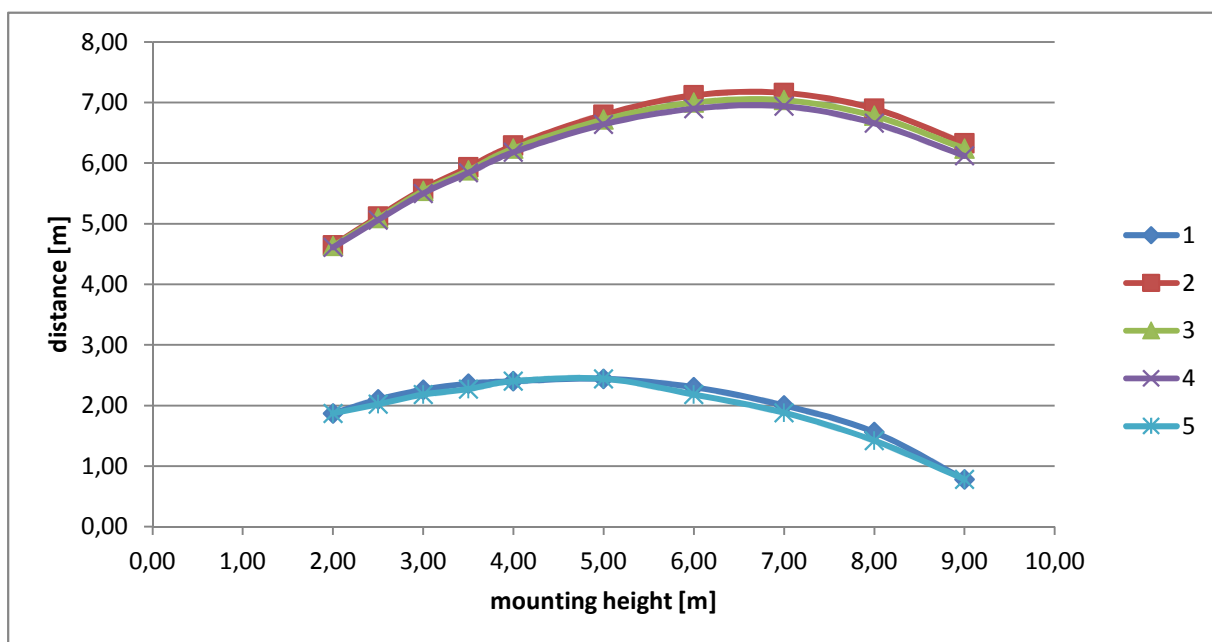

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	1,87	4,64	4,63	4,61	1,87
2,50	2,10	5,12	5,09	5,06	2,02
3,00	2,26	5,57	5,54	5,50	2,18
3,50	2,36	5,93	5,88	5,84	2,27
4,00	2,40	6,29	6,24	6,18	2,40
5,00	2,44	6,80	6,72	6,64	2,44
6,00	2,30	7,12	7,00	6,90	2,18
7,00	2,00	7,16	7,04	6,94	1,88
8,00	1,56	6,90	6,78	6,66	1,42
9,00	0,78	6,33	6,24	6,12	0,78

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m