


Light Planning Data Emergency lighting

Type: NLILEERL029E
 Illuminant: ERT-LED (1x3W)
 Description: ERTLED 230VAC/DC changeable lens

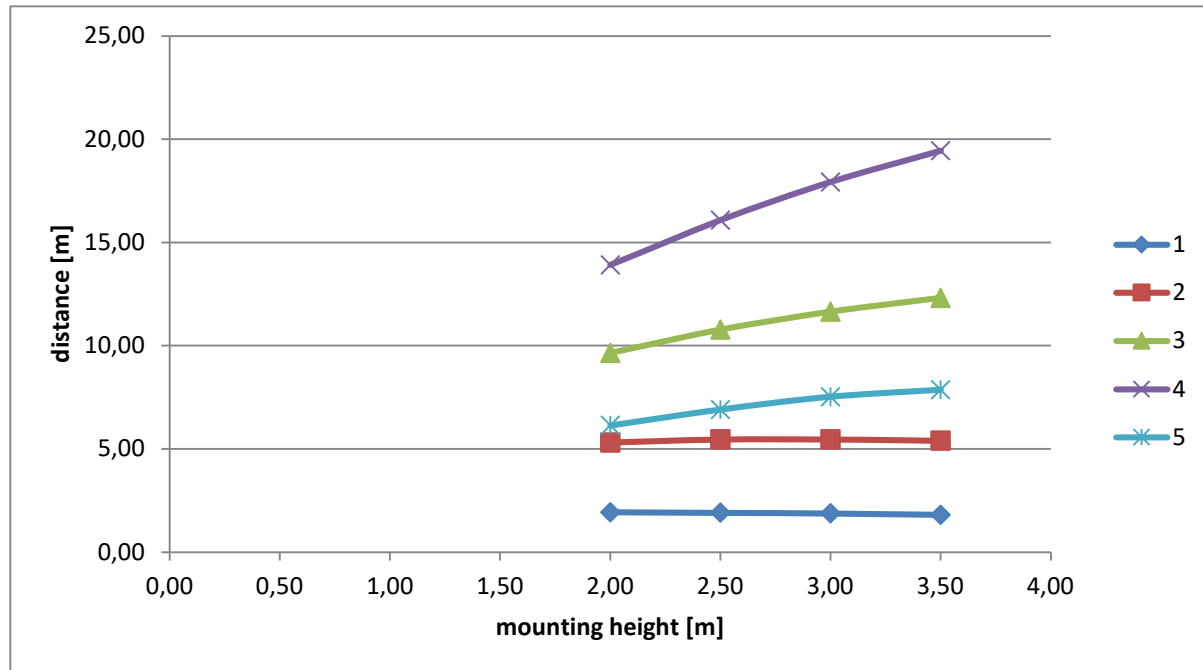

Luminaire distance table for even escape routes

 = valid distances in [m]

	1	2	3	4	5
Mounting Height [m]					
2,00	1,93	5,31	9,65	13,91	6,14
2,50	1,91	5,46	10,78	16,08	6,91
3,00	1,88	5,46	11,65	17,93	7,53
3,50	1,81	5,40	12,32	19,45	7,87

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m