


Light Planning Data Emergency lighting

Type: NLEERL433W
Illuminant: ERT-LED (1x5W)
Description: Emerg. Lum. EE 1x5W ERTLED
Wireless 3h 230V - with corridor lens

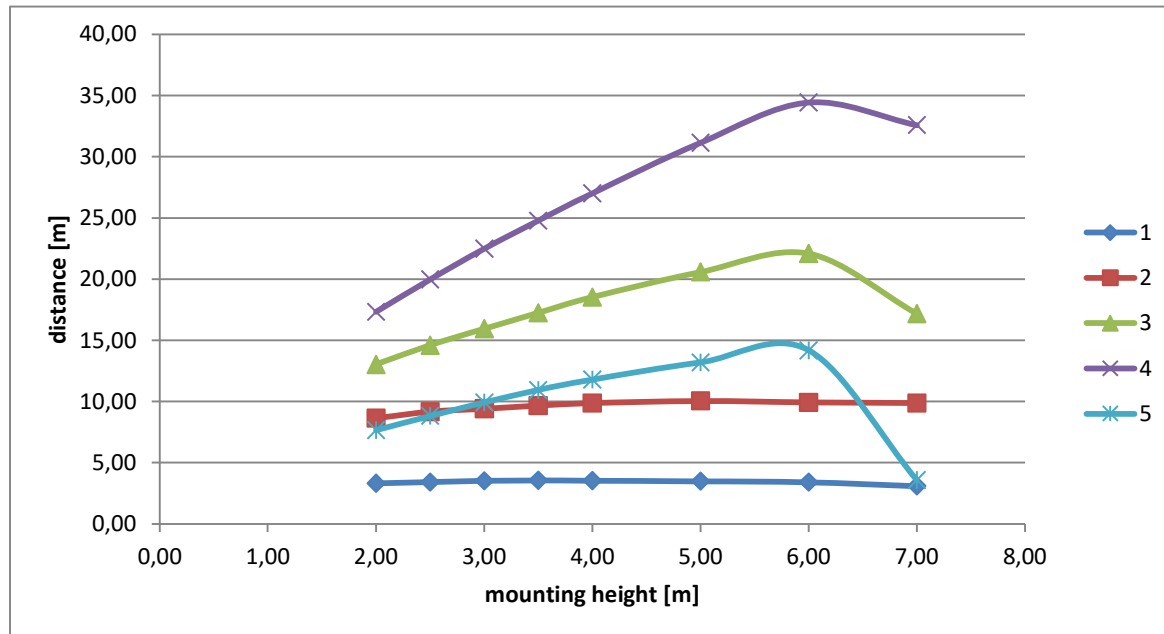

Luminaire distance table for even escape routes

 = valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	3,30	3,30	8,64	13,03	7,65
2,50	3,42	3,42	9,16	14,60	8,81
3,00	3,51	3,51	9,41	15,95	9,92
3,50	3,55	3,55	9,66	17,24	10,94
4,00	3,53	3,53	9,87	18,53	11,79
5,00	3,48	3,48	10,04	20,58	13,20
6,00	3,40	3,40	9,92	22,08	14,18
7,00	3,08	3,08	9,88	17,18	3,58

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m