


Light Planning Data Emergency lighting

Type: NLEERL433W
Illuminant: ERT-LED (1x5W)
Description: Emerg. Lum. EE 1x5W ERTLED
Wireless 3h 230V - with round lens

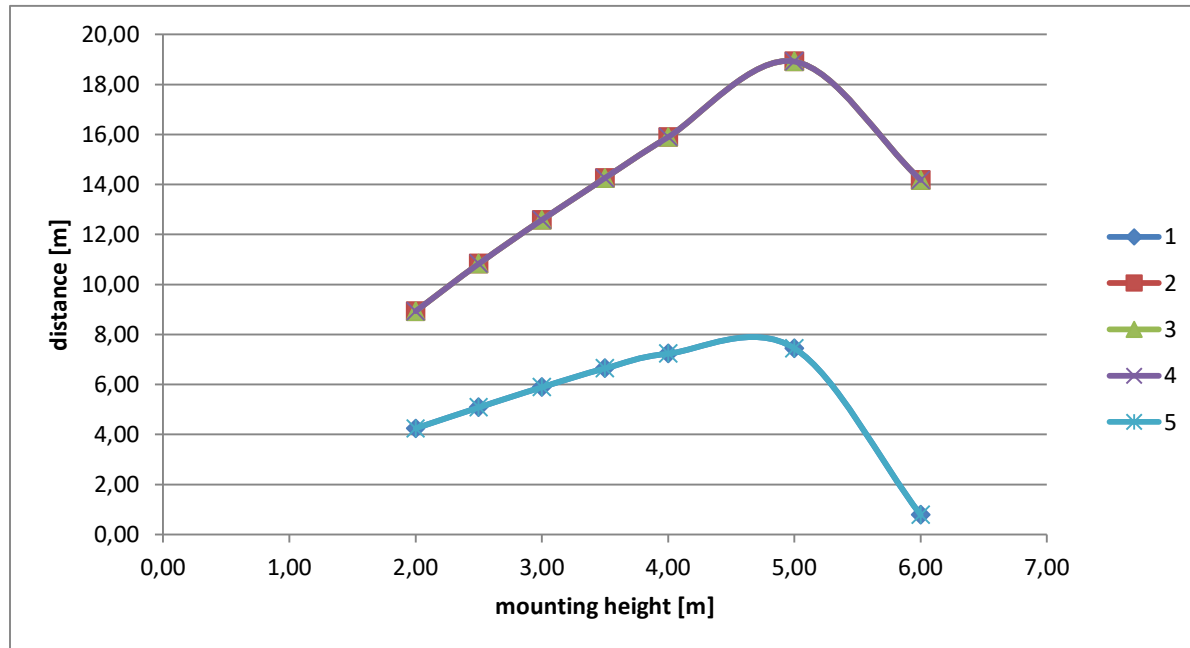

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	4,24	8,93	8,93	8,93	4,24
2,50	5,08	10,83	10,83	10,83	5,08
3,00	5,89	12,58	12,58	12,58	5,89
3,50	6,64	14,25	14,25	14,25	6,64
4,00	7,23	15,90	15,90	15,90	7,23
5,00	7,44	18,92	18,92	18,92	7,44
6,00	0,78	14,18	14,18	14,18	0,78

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m