


Light Planning Data Emergency lighting

Type: NLLIU030ML
Illuminant: 30W LED
Description: Emergency luminaire Linda industry
30W LED 230V

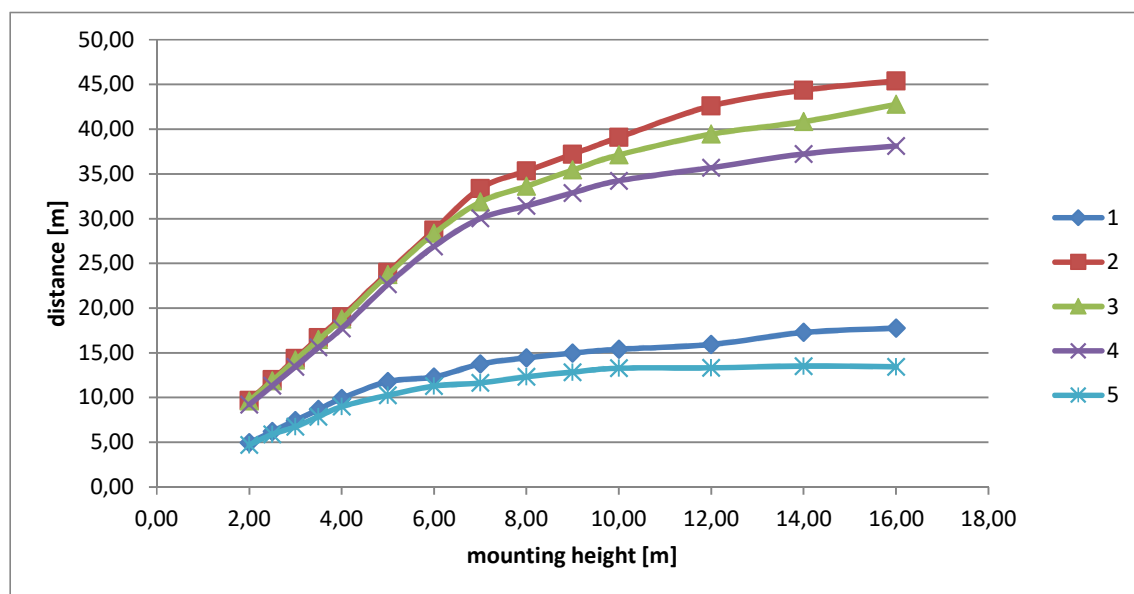

Luminaire distance table for even escape routes

 = valid distances in [m]

	1	2	3	4	5
Mounting Height [m]					
2,00	4,95	9,67	9,60	9,22	4,71
2,50	6,19	11,99	11,87	11,33	5,89
3,00	7,43	14,35	14,17	13,45	6,74
3,50	8,66	16,69	16,47	15,60	7,86
4,00	9,90	19,01	18,76	17,71	8,98
5,00	11,78	23,98	23,74	22,66	10,26
6,00	12,30	28,70	28,34	26,90	11,28
7,00	13,74	33,38	31,86	30,02	11,64
8,00	14,44	35,32	33,62	31,42	12,32
9,00	14,97	37,20	35,43	32,88	12,84
10,00	15,40	39,08	37,12	34,24	13,28
12,00	15,93	42,60	39,45	35,70	13,32
14,00	17,28	44,36	40,84	37,24	13,52
16,00	17,76	45,40	42,76	38,12	13,44

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: $1lx$, E_{min} on the half width: $0,5lx$, Maximum uniformity: 40:1, Width of escape route: 2m