


Light Planning Data Emergency lighting

Type: NLLTU039ML
Illuminant: HP-LED (5W)
Description: Emergency luminaire Linda
Transparente ML 5W/840 LED 230V

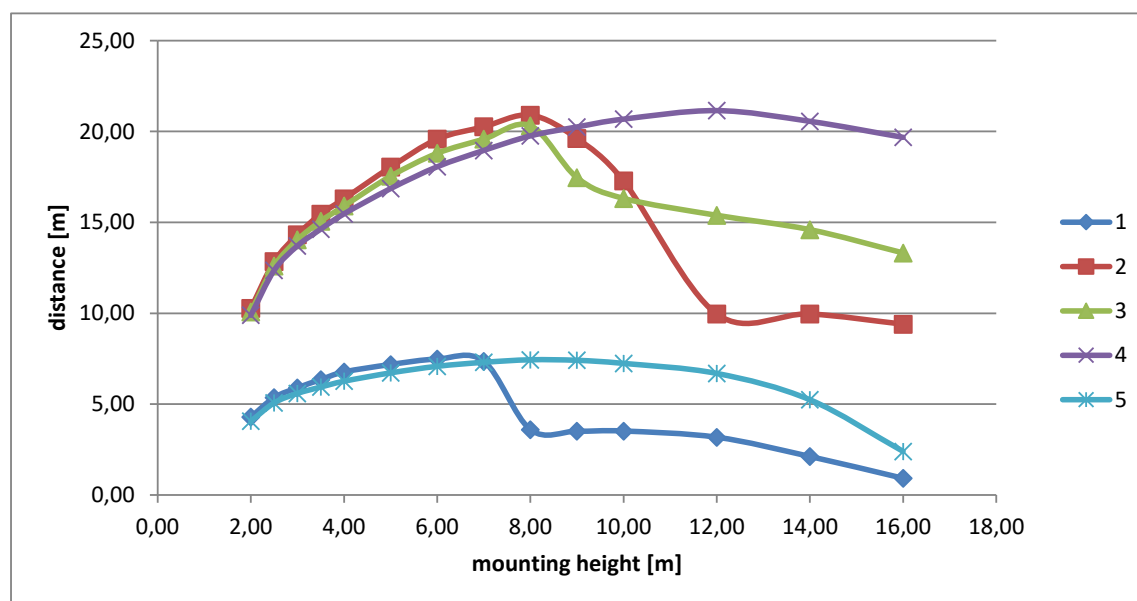

Luminaire distance table for even escape routes

 = valid distances in [m]

	1	2	3	4	5
Mounting Height [m]					
2,00	4,29	10,27	10,08	9,89	4,06
2,50	5,36	12,84	12,60	12,36	5,07
3,00	5,90	14,32	14,04	13,71	5,59
3,50	6,35	15,46	15,07	14,63	5,94
4,00	6,77	16,30	15,90	15,47	6,26
5,00	7,18	18,04	17,54	16,86	6,72
6,00	7,48	19,58	18,80	18,06	7,08
7,00	7,36	20,26	19,58	18,96	7,30
8,00	3,60	20,90	20,32	19,76	7,44
9,00	3,51	19,62	17,46	20,25	7,41
10,00	3,52	17,28	16,32	20,68	7,24
12,00	3,18	9,96	15,39	21,15	6,69
14,00	2,12	9,96	14,60	20,56	5,24
16,00	0,92	9,40	13,32	19,68	2,40

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m