


Light Planning Data Emergency lighting

Type: NCS3LEW14-
Illuminant:
Description: Security luminaire CERTO S3 LED
24V CON, with corridor lens

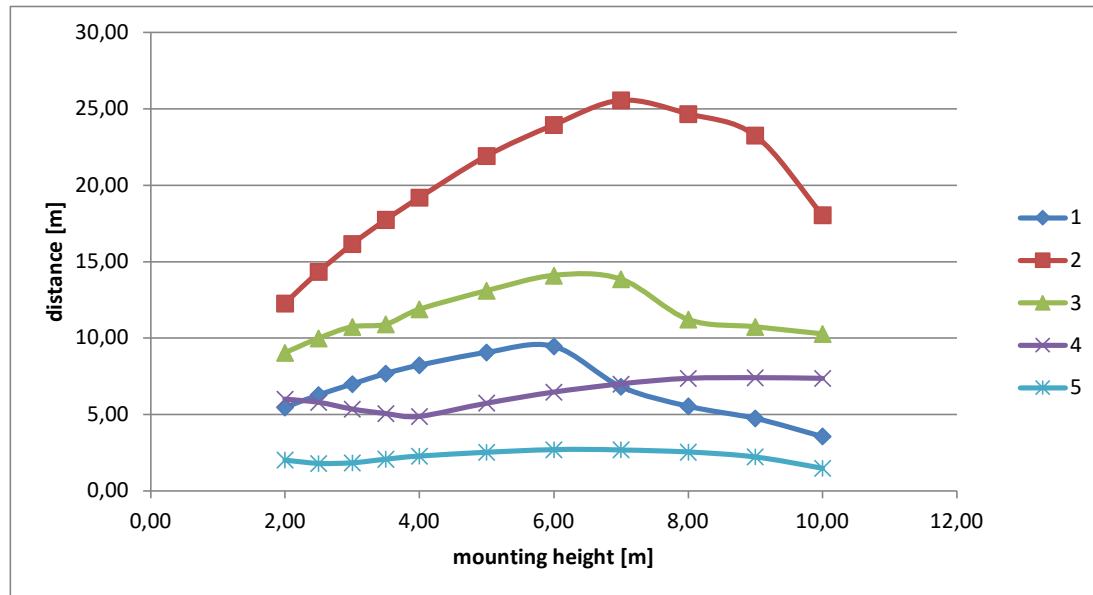

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1	2	3	4	5
2,00	5,46	12,27	9,05	6,00	2,01
2,50	6,27	14,33	9,99	5,79	1,80
3,00	6,99	16,15	10,74	5,35	1,83
3,50	7,68	17,74	10,91	5,06	2,07
4,00	8,23	19,19	11,88	4,88	2,28
5,00	9,06	21,92	13,10	5,74	2,52
6,00	9,46	23,96	14,10	6,46	2,70
7,00	6,82	25,56	13,86	7,00	2,68
8,00	5,54	24,68	11,22	7,36	2,54
9,00	4,74	23,25	10,74	7,41	2,22
10,00	3,56	18,04	10,28	7,36	1,48

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_min on the center line: 1lx, E_min on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m