


Light Planning Data Emergency lighting

Type: NCC1CDW24-
Illuminant: 1900-01-00
Description: Security luminaire C1 LED 24V CON

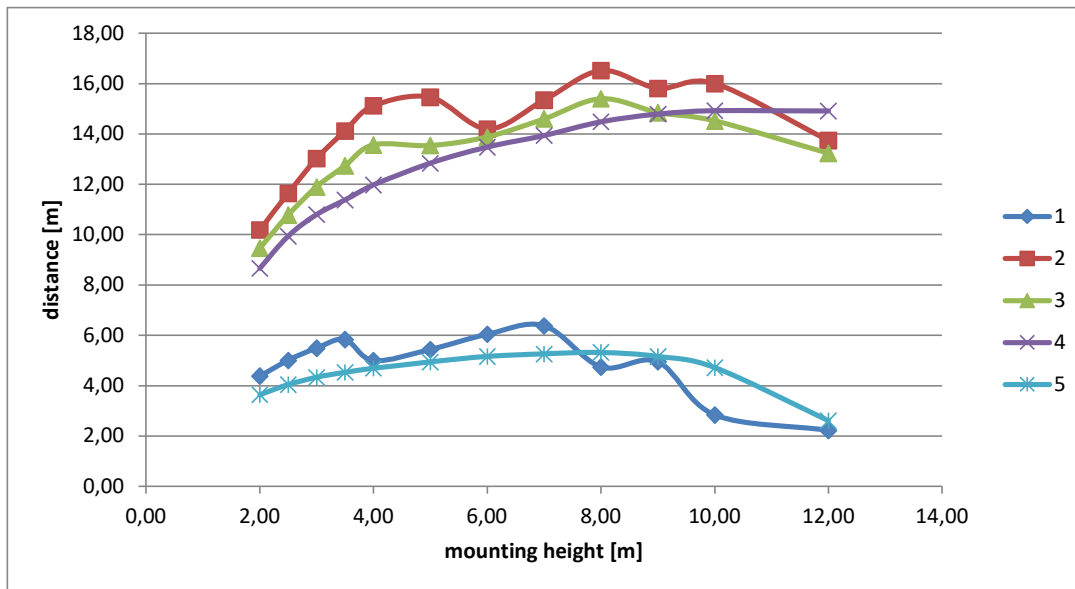

Luminaire distance table for even escape routes

= valid distances in [m]

Mounting Height [m]	1 	2 	3 	4 	5 
2,00	4,38	10,19	9,46	8,66	3,64
2,50	5,01	11,64	10,78	9,94	4,04
3,00	5,49	13,02	11,90	10,80	4,33
3,50	5,83	14,12	12,74	11,38	4,53
4,00	5,00	15,12	13,57	11,97	4,69
5,00	5,44	15,46	13,54	12,84	4,94
6,00	6,04	14,20	13,88	13,48	5,16
7,00	6,38	15,34	14,60	13,94	5,26
8,00	4,74	16,52	15,40	14,48	5,32
9,00	4,95	15,81	14,85	14,79	5,16
10,00	2,84	16,00	14,52	14,92	4,72
12,00	2,22	13,74	13,23	14,91	2,61

Above values are valid for the following parameters: Emergency lighting factor: 1, Maintenance factor: 0,8, E_{min} on the center line: 1lx, E_{min} on the half width: 0,5lx, Maximum uniformity: 40:1, Width of escape route: 2m