

E30 Junction Box Double Fused





NLWKE304

Schrack-Info

Junction box compliant with E DIN IEC 60998-2-5, IP66 $U_i=450$ V, with genuine function preservation E 30 according to DIN 4102 part 12, for use as branch box **with double fused branch**, LxWxH=160x160x110 mm. With special duroplast terminal blocks on DIN rail, 3 poles through-wired, terminating capacity per pole 2 times 0.5 to 4 mm², 3 poles in the double fused branch, 2 x fused terminal blocks max 6.3 A (5x20 mm) terminating capacity per pole 1 times 0.5 to 4 mm² with wall plug set, 3 pcs. cable screws M25 (gland width 6-15 mm)

Dimensioned Drawing

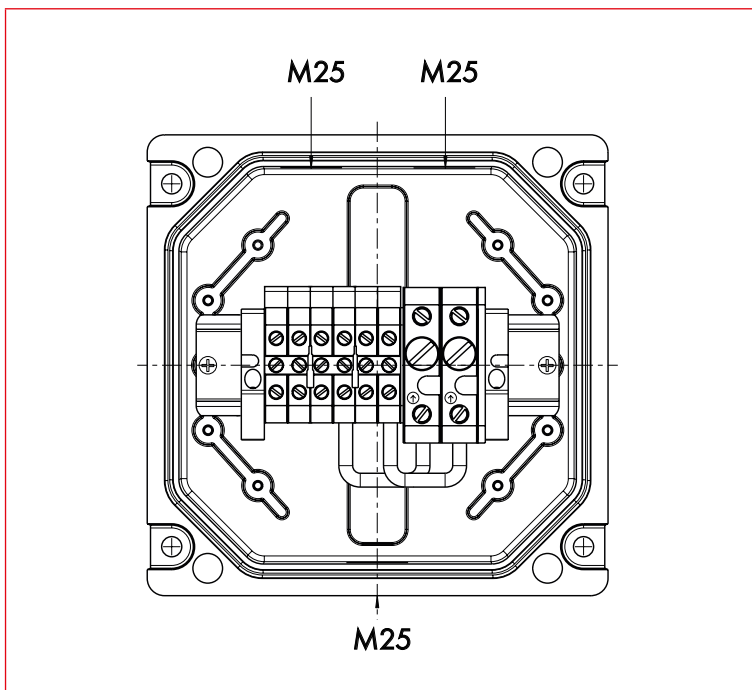

DESCRIPTION	AVAILABLE	ORDER NO.
E30 junction box 3 poles for CPS with selective fuse breaking 2 poles		NLWKE304



Order no. blue: on stock, usually ready for delivery on the day of order