

PROFIL ZUBEHÖR | PROFILE ACCESSORIES


LIPZ003002

Einbau Montagewinkel SLI
Mounting angle SLI

LIEK100002

Torx Bit TX8 für Endkappenschrauben
Torx Bit TX8 for endcap screws

LIPZ006001

Saugnapf 30mm
Suction cup 30mm

SLI PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
SLI PROFILE FITTED WITH 2 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16,5MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung
SL Flach Transparent
91% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Transp.
95% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Opal
93% Transmission

PMMA Abdeckung
SL Flach Opal
76% Transmission

PMMA Abdeckung
SL Eckig Opal
76% Transmission

PMMA cover
SL flat transparent
91% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic transparent
95% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic milky
93% transmission

PMMA cover
SL flat milky
76% transmission

PMMA cover
SL square milky
76% transmission

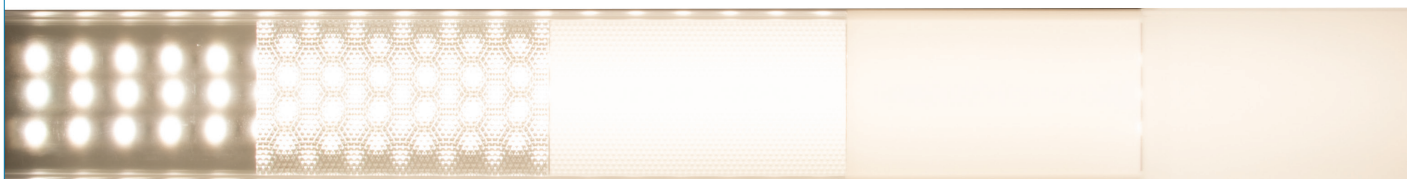
SLI PROFIL BESTÜCKT MIT 3 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN
SLI PROFILE FITTED WITH 3 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16,5MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung
SL Flach Transparent
91% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Transp.
95% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Opal
93% Transmission

PMMA Abdeckung
SL Flach Opal
76% Transmission

PMMA Abdeckung
SL Eckig Opal
76% Transmission

PMMA cover
SL flat transparent
91% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic transparent
95% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic milky
93% transmission

PMMA cover
SL flat milky
76% transmission

PMMA cover
SL square milky
76% transmission

SLI PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCH. ABDECKUNGEN
SLI PROFILE FITTED WITH 2 X FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7,15MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung
SL Flach Transparent
91% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Transp.
95% Transmission

PMMA Abdeckung SL Flach
Transp. 91% Transmission +
Mikroprismatik Opal
93% Transmission

PMMA Abdeckung
SL Flach Opal
76% Transmission

PMMA Abdeckung
SL Eckig Opal
76% Transmission

PMMA cover
SL flat transparent
91% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic transparent
95% transmission

PMMA cover SL flat
transparent 91% transmission +
Microprismatic milky
93% transmission

PMMA cover
SL flat milky
76% transmission

PMMA cover
SL square milky
76% transmission