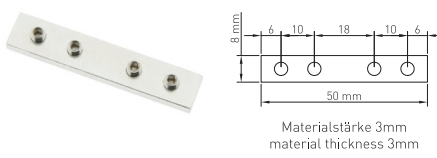
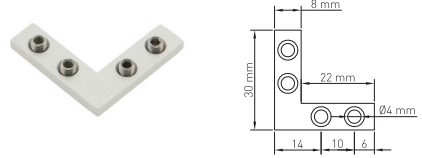


LED Profile SLR | max. LED power per meter: 55W → 3 x Flexstrip 75 or 2 x Flexstrip 108 + 1 x Flexstrip 75

187

PROFIL ZUBEHÖR | PROFILE ACCESSORIES

 LIPZ001002 Seilabhänger 2m inkl. Deckenbefestigung Wire suspension 2m incl. ceiling fixture LIPZ001005 Seilabhänger 5m inkl. Deckenbefestigung Wire suspension 5m incl. ceiling fixture	 LIPZ002003 Seilstopper mit Y-Aufhängung 120mm Seil 4mm Kugeln Wire stopper with Y-suspension 120mm wire 4mm rolls	 LIEK100002 Torx Bit TX8 für Endkappenschrauben Torx Bit TX8 for endcap screws
 LIPZ006001 Saugnapf 30mm Suction cup 30mm	Für 1 Profilverbindung sind 2 Stück Verbinder notwendig For 1 profile connection 2 pieces connectors necessary  LIPZ004001 Profilverbinder SLR Profile connector SLR	Für 1 Profilverbindung sind 2 Stück Verbinder notwendig For 1 profile connection 2 pieces connectors necessary  LIPZ004004 Eck Profilverbinder SLR Corner Profile connector SLR

SLR PROFIL BESTÜCKT MIT 3 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN SLR PROFILE FITTED WITH 3 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS


PMMA Abdeckung SL Flach Transparent 91% Transmission	PMMA Abdeckung SL Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung SL Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung SL Flach Opal 76% Transmission	PMMA Abdeckung SL Eckig Opal 76% Transmission
PMMA cover SL flat transparent 91% transmission	PMMA cover SL flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover SL flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover SL flat milky 76% transmission	PMMA cover SL square milky 76% transmission

SLR PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCH. ABDECKUNGEN SLR PROFILE FITTED WITH 2 X FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7.15MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung SL Flach Transparent 91% Transmission	PMMA Abdeckung SL Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung SL Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung SL Flach Opal 76% Transmission	PMMA Abdeckung SL Eckig Opal 76% Transmission
PMMA cover SL flat transparent 91% transmission	PMMA cover SL flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover SL flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover SL flat milky 76% transmission	PMMA cover SL square milky 76% transmission

Netzteile mit max. 52mm Breite und
32mm Höhe im Profil integrierbar

Aluminium Abdeckung SL erforderlich!

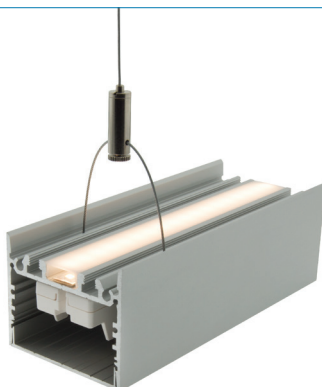

Power Supplies with max. 52mm width and
32mm height profile integrable

aluminum cover SL required!