

Toolless Connection



IKBC1040



IKBC1100



IKBC2100




IKBC0001


Schrack-Info

- The proven system in compact 10-way design
- For mounting on Cu rail (IKBC1100, IKBC1040)
- For mounting on DIN rail 35 mm (IKBC1100, IKBC1040)
- Proven push-in clamp design
- Maximum current carrying capacity 250 A, 50 A for each output
- Degree of protection: IP20

Dimensioned drawing

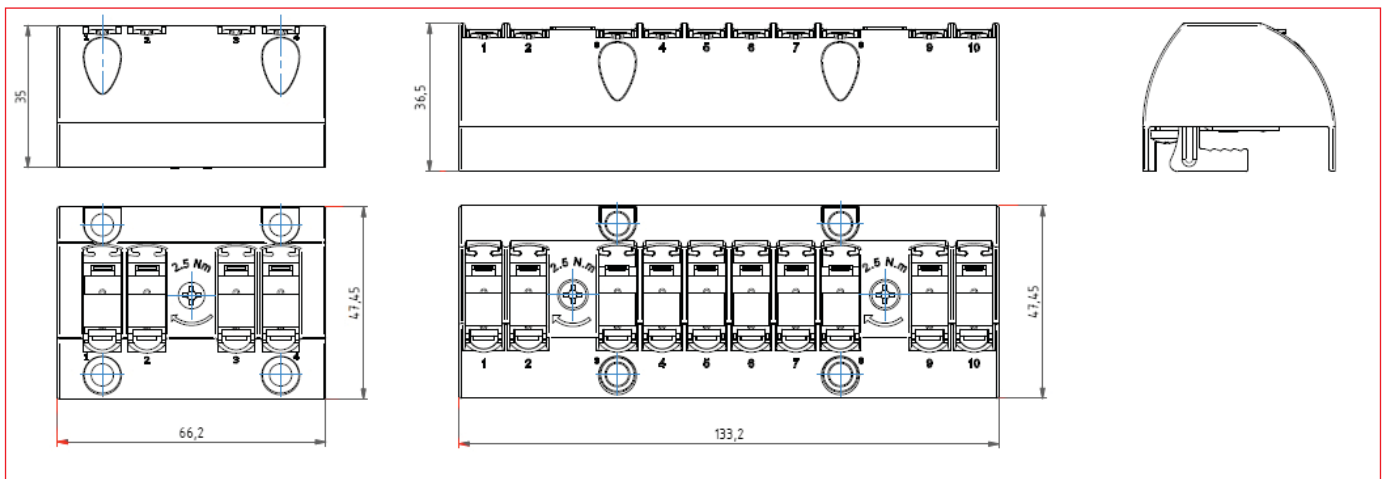


Dimensioned drawing

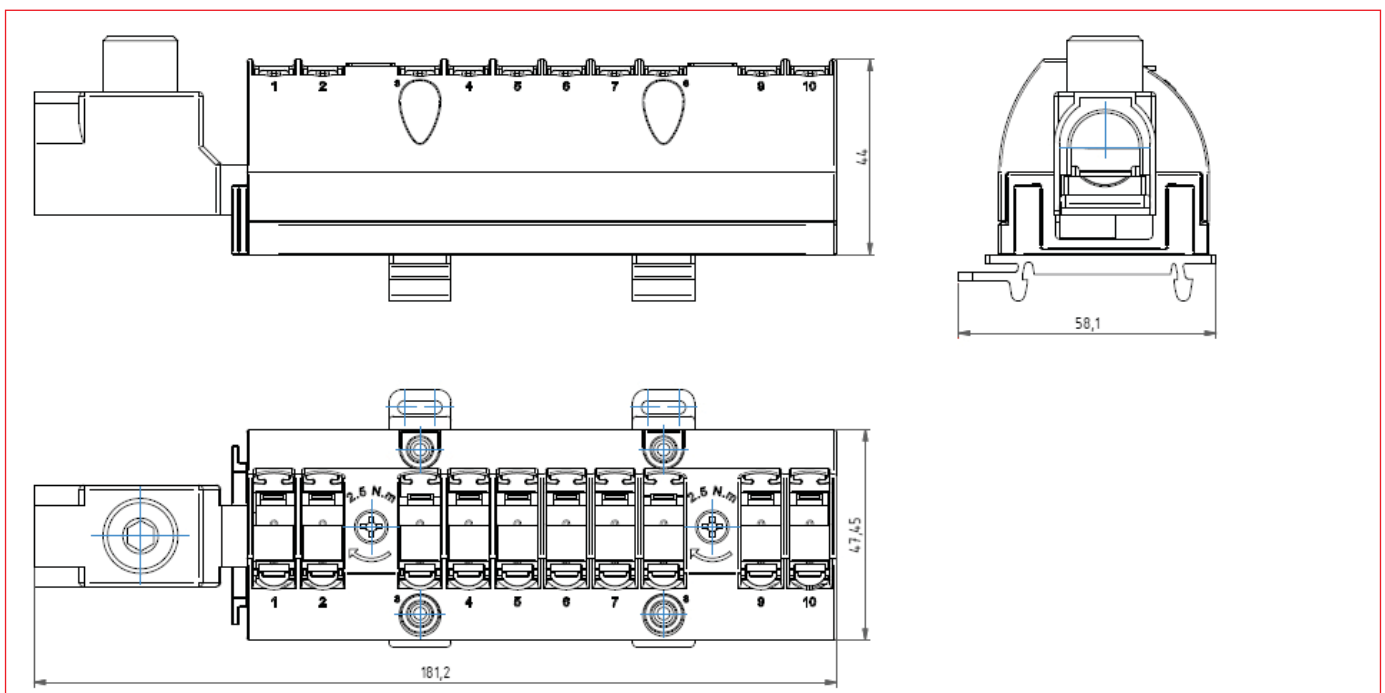

Toolless Connection

Max. operation voltage:	1000 V AC, 1500 V DC
Max. current carrying capacity:	250 A, 50 A per output
Outgoings	Multi wire: Flexible with ferrule:
	10 x 1.5 mm ² – 10 mm ² (14 AWG – 8 AWG) 10 x 1.5 mm ² – 10 mm ² (14 AWG – 8 AWG)
Protection class	IP20

DESCRIPTION	AVAILABLE	ORDER NO.
Socket 4x for Cu-busbar-mounting		IKBC1040
Socket 10x for Cu-busbar-mounting		IKBC1100
Socket 10x for DIN-rail mounting		IKBC2100
Plug gray		IKBC0001
Plug blue		IKBC0002
Plug green		IKBC0003
Plug red		IKBC0004
DIN-rail adapter		IKBCZ001