

Mains Analyser MF9



MGF37900

Schrack-Info

- Three-phase line 80...500V (phase-phase)
- Connection on dedicated CT
- Programmable external CT ratio
- Active energy class 1
- Pulse output
- RS485 communication by ModBus RTU/TCP protocol
- Phase sequence correction, diagnostic

Housing

Front frame	96 x 96 mm
Depth	62 mm
Panel cut-out flush mounting	92 x 92 mm
Housing material	Polycarbonate (self-extinguishing)
Degree of protection	IP 54 (front) – IP 20 (terminals)

Display

Display	LCD backlit
Measuring display	4 lines – 4 digits, size 9 mm
Energy count	8 digits, size 6 mm
Accuracy (+ 1 digit)	Active energy: class 1
	Reactive energy: class 1
	Voltage: class 0,5
	Current: class 0,5
	Power: class 1
	Reactive power: class 1
	Apparent power: class 1
Programming	Frequency: $\pm 0,1$ Hz
	THD: class 2
4 front keys, access protected by password	

Programmable parameters

Parameters	Customized display page
	Connection (1+N or 3+N)
	Average power /current delay time
	Start time (run hour meter)
	RS485 communication
	Impulse output
	CT - ratio

Mains Analyser MF9

Input

Input	Single-phase, three phase network 4-wire
Rated voltage U_n	400V (three-phase, phase-phase)
Max. input voltage	80 500V (three-phase, phase-phase) 50 290V (single-phase)
Rated current	5A – only with current transformer
Max. current I_{max}	1.2 I_n
Overload	20 x I_n /0.5s
Rated frequency	50Hz - 60 Hz (automatic selection)
Frequency tolerance:	45 65 Hz
Harmonic contents:	up to 40. harmonic
Peak factor:	Current 2 - Voltage 1,5
Starting time (energy count):	< 5s
Rated burden:	Voltage: < 0,2VA (phase - neutral to the voltage rating) Current: < 0,4VA (for phase to the max. current 6A)

Auxiliary supply

Auxiliary supply:	Taken from measurement (Phase L1 - N)
-------------------	---------------------------------------

Insulation

Installation category:	III
Pollution degree:	2
Insulation voltage rating:	300 V (phase-neutral conductor)
Impulse withstand resistance:	Considered circuits: 6 kV, 1,2/50 μ s, 0,5 J, 3 kV alternating voltage r.m.s 50Hz 1 min Measure inputs: 6 kV, 1,2/50 μ s, 0,5 J, 3 kV alternating voltage r.m.s 50Hz 1 min All circuits and earth: 4 kV alternating voltage r.m.s 50Hz 1 min

Elektro magnetic compatibility

Emission according to:	EN 61326-1 class B, IEC 61326-1 class B
Immunity according to:	EN 61326-1, IEC 61326-1

Environmental conditions


Reference temperature:	23 °C $\pm$ 2 °C
Operation temperature:	-5 ... 55 °C
Max. temperature range (storage, transport)	-25 ... 70 °C
Max. powerloss	$\leq$ 5W

Terminal capacity


Terminal type	Screw terminals
Voltage input:	Rigid wire 0.05mm ² - 4 mm ² Flexible wire 0.05mm ² - 2.5 mm ² Torque: 0.6 Nm
Current input:	Rigid wire 0.05mm ² - 6 mm ² Flexible wire 0.05mm ² - 4 mm ² Torque: 1 Nm
Outputs:	Rigid wire 0.05mm ² - 4 mm ² Flexible wire 0.05mm ² - 2.5 mm ² Torque: 0.6 Nm

Mains Analyser MF9

MGF37900 Dimensional Drawing

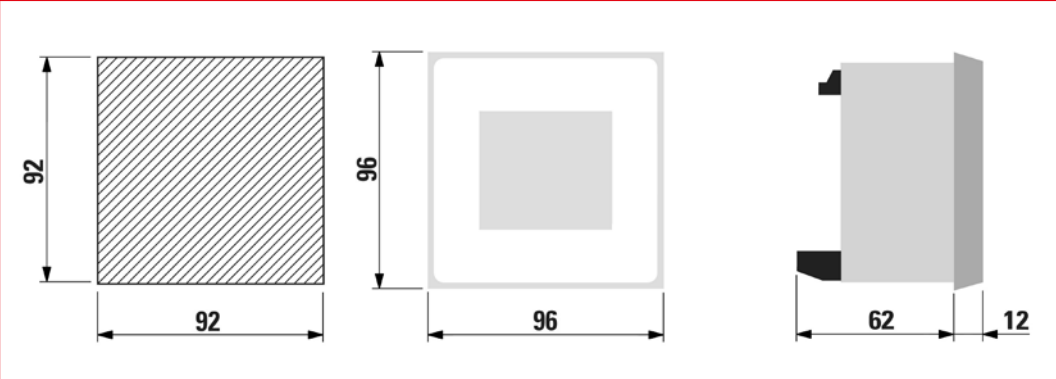

MGF37900 Wiring Diagram

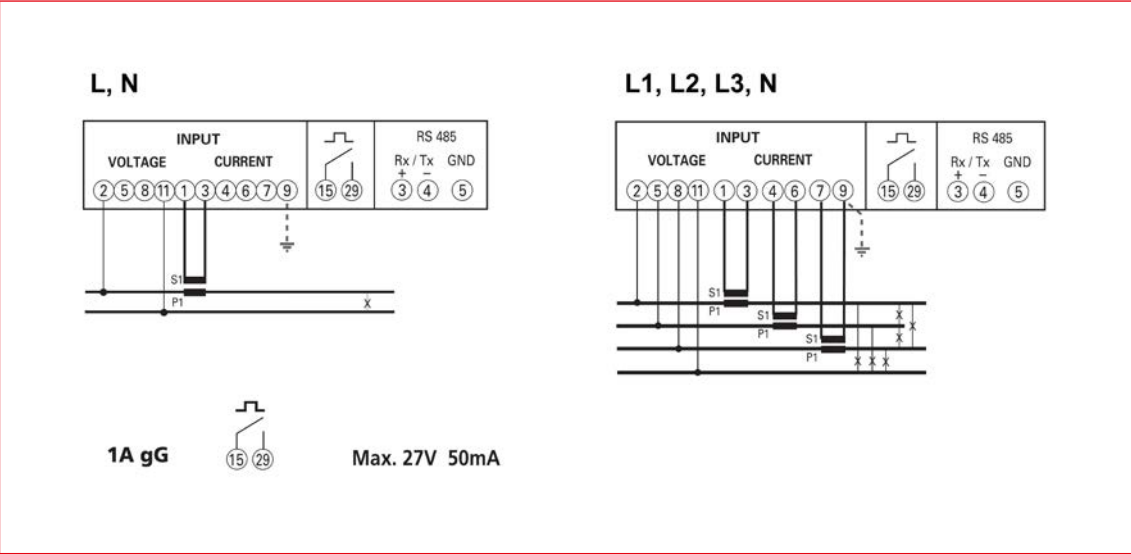

DESCRIPTION	AVAILABLE	ORDER NO.
Netanalyser MF9, 96x96mm, with RS 485 connection for ModBus RTU/TCP		MGF37900