

Modular push-button with LED




Schrack-Info

- Modular push-button with LED-indicator
- Lift terminals with protection against incorrect insertion


BZ117531

Type	BZ127531	BZ117531
Function	push-button with LED-indicator	
Function of contact	1 NO + 1 NC	1 NO + 1 NC
Rated voltage of LED	24V-AC/DC	230V-AC
Colour of LED	orange	orange
Standards	EN 60669-1	
Rated voltage	250V AC	
Rated frequency	50/60Hz	
Rated current	16A	
Power loss	2W	
Degree of protection	IP40	
Finger and hand touch safe:	Contact safety device according to BGV A3, VBG4	
Climatic conditions	according to IEC/EN 60068	
Terminals	lift terminals	
Terminal capacity	1-10mm ²	

BZ1x7531 Wiring diagram

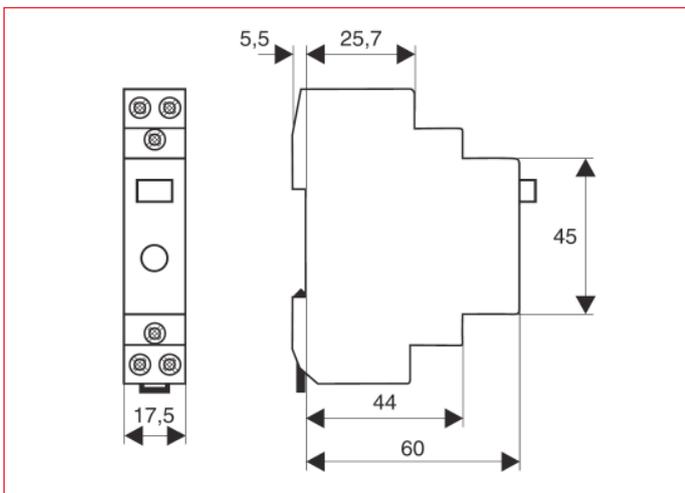

BZ1X7531 Wiring diagram



DESCRIPTION	AVAILABLE	ORDER NO.
16A, 1 NO + 1 NC, 24V-AC/DC		BZ127531
16A, 1 NO + 1 NC, 230 V-AC/DC		BZ117531