



## **MONTAGEANLEITUNG / INSTRUCTION SHEET:** **HSEDG2UW5F KAT.5e DOSE 2xRJ45 GESCHIRMT** **HSEDG2UW5F CAT.5e OUTLET 2xRJ45 SHIELDED**


## **BESCHREIBUNG / DESCRIPTION**



**2 PORT**




Rahmen: 80 x 80 mm  
Frame: 80 x 80 mm

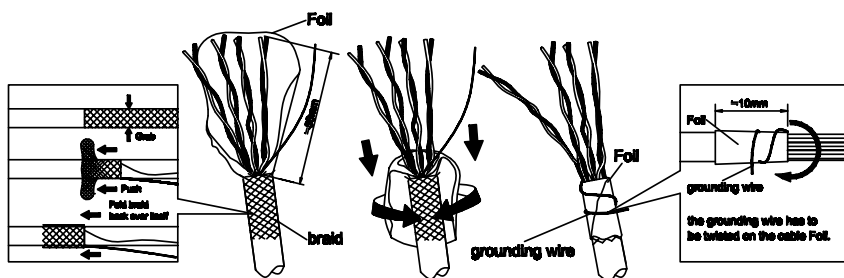


Den Geflechtschirm (falls vorhanden) über den Mantel zurückschieben. Den Folienschirm so über den Mantel zurückklappen, dass die leitende Seite zwecks Schirmkontaktierung aussen liegt. Die Folie sollte das Kabel möglichst 360° bedecken. Beidraht (falls vorhanden) über die Folie wickeln.

Fold braid (if there is one) back over the outer sheet. Fold back the foil over the outer sheet in that way, that the conductive side is on the outside to ensure contact to grounding clip. Drain- (or Grounding-) wire has to be twisted around the cable foil.

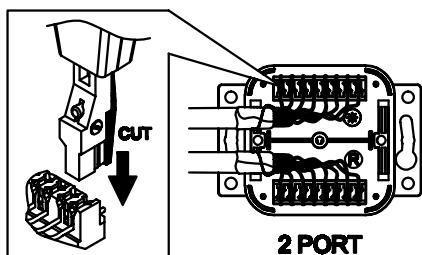


**2 PORT**




Legen Sie die Drähte entsprechend dem Farbcode 568A/568B in den entsprechenden Anschluss der IDC Anschlussleiste ein. Kontaktieren Sie die Drähte mit dem Anschlusswerkzeug (Best.Nr.: HKRONELSA). Die Verdrehung ist bis zum Kontaktblock beizubehalten. Den Twist nicht öffnen.


Place the wires into the IDC connecting blocks according to the color code 568A/568B on the blocks. Punch the wires down with a punch down tool (order-code: HKRONELSA) in order to terminate them. The cable twist has to remain up to the contact block. Do not open twist.



Befestigen Sie den Erdungs-Clip.  
Screw the grounding clip.



Schrauben Sie den Gehäusedeckel an.  
Screw down the back cover.



Montieren Sie den Rahmen und die Zentralplatte.  
Lock the frame and bezel together.